GUIDE

301633

# 港迪HF500系列变频器

GUIDE

Wuhan Guide Technology Co., Ltd.

6

027-87920068

027-87927299

www.gdetec.com

400-0077-570

2025.07

©

Copyright©Wuhan Guide Technology Co., Ltd.

# ABOUT US

301633

“ ”

“ ” “ ” “

” “ 10 ” “

100 ” “ 100 ” “ ”

“ ” “

” “ ”

“ ” “

” “ ” “

” “ ”

“ ”

“ ” “

”

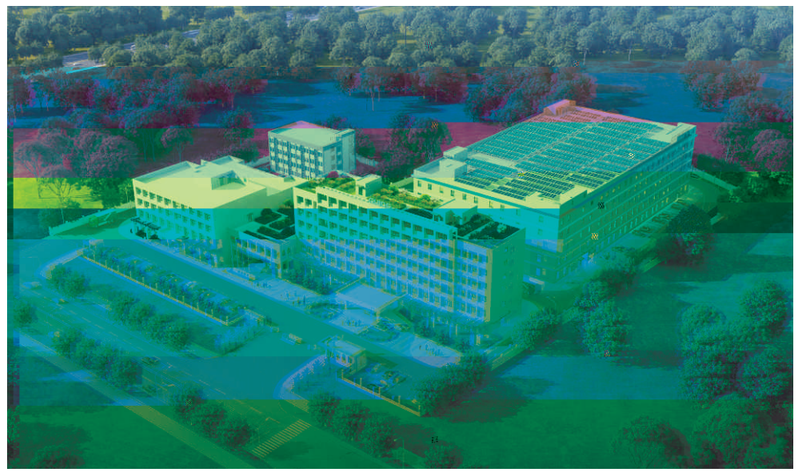




1 ..... 03

2 ..... 03—17

2.1 HF500 400V ..... 03—08

HF500-4 ..... 03

HF500-4 ..... 03

HF500-4 ..... 04

HF500B-4 ..... 04

HF500B-4 ..... 05

HF500B-4 ..... 06

HF500A-4 ..... 06

HF500A-4 ..... 07

HF500A-4 ..... 08

2.2 HF500 690V ..... 08—17

HF500LC-6 ..... 08

HF500LC-6 ..... 09

..... 10

..... 10

HF500-6 ..... 11

HF500-6 ..... 11

HF500LC-6 HF500-6 ..... 12

..... 12

..... 14

HF500B-6 ..... 15

HF500B-6 ..... 15

HF500B-6 ..... 16

HF500A-6 ..... 16

HF500A-6 ..... 17

HF500A-6 ..... 17

3 ..... 18—54

3.1 HF500 400V ..... 18—36

HF500-4 ..... 18—20

C1~C9 ..... 21

C10~C11 ..... 21

HF500B-4 ..... 22

HF500B-037-4-D HF500B-400-4-D ..... 23

HF500B-C ..... 24

HF500A-4 ..... 24

75kW~400kW ..... 25—26

250kW 315kW 400kW ..... 27

500kW 630kW 800kW ..... 28

1200kW ..... 29

1600kW ..... 29

2000kW ..... 29

2400kW ..... 30

HF500-4 C1 ..... 30

75kW~132kW C1 ..... 31

250kW~400kW C1 ..... 32

500kW~800kW C1 ..... 32

HF500-4 C2 C3 ..... 33

75kW~400kW C2 C3 ..... 34

HF500-4 C4 ..... 35

75kW~132kW C4 ..... 35

250kW~400kW C4 ..... 36

500kW~800kW C4 ..... 36

3.2 HF500 690V ..... 37—54

HF500LC-6 ( ) ..... 37

HF500-6 ( ) ..... 38—40

HF500B-6 ..... 40

160kW~560kW ..... 41

..... 42

HF500A-6 ..... 43

160kW~500kW ..... 43—49

160kW 250kW ..... 50

315kW 400kW 500kW ..... 51

630kW 800kW 1000kW ..... 52

1500kW ..... 53

2000kW ..... 53

2500kW ..... 54

3000kW ..... 54

4 HF500 ..... 55—57

# 1

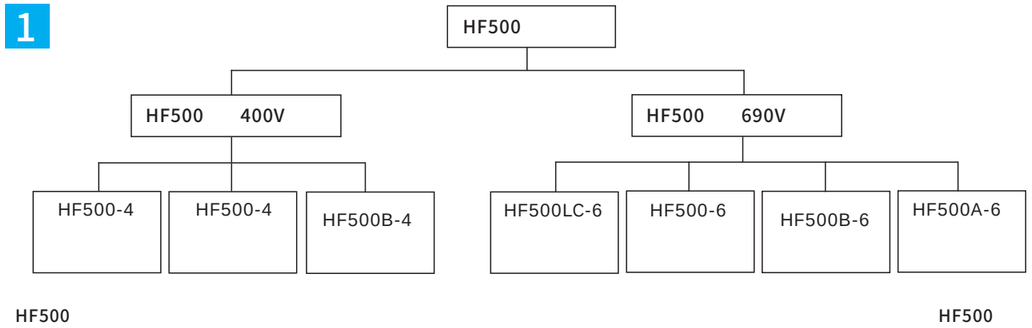


HF500 HF500

# 2

## 2.1 HF500 400V

### HF500-4

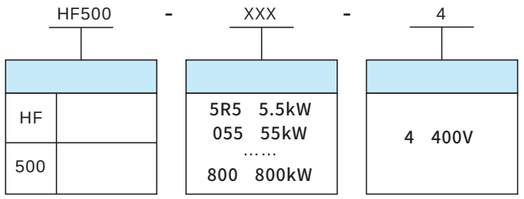


### HF500-4

| | | | | | |
|---|---|---|---|---|---|
| | [A] | [kW] | [A] | [kW] | |
| HF500-5R5-4 | 14 | 5.5 | 9.5 | 3.7 | C1 |
| HF500-7R5-4 | 18 | 7.5 | 15 | 5.5 | |
| HF500-011-4 | 24 | 11 | 20 | 7.5 | C2 |
| HF500-015-4 | 32 | 15 | 25 | 11 | |
| HF500-018-4 | 40 | 18.5 | 35 | 15 | C3 |
| HF500-022-4 | 45 | 22 | 42 | 18.5 | |
| HF500-030-4 | 65 | 30 | 49 | 22 | |
| HF500-037-4 | 75 | 37 | 65 | 30 | C4 |
| HF500-045-4 | 92 | 45 | 79 | 37 | |
| HF500-055-4 | 115 | 55 | 93 | 45 | |
| HF500-075-4 | 155 | 75 | 125 | 55 | C5 |
| HF500-090-4 | 185 | 90 | 160 | 75 | |
| HF500-110-4 | 212 | 110 | 185 | 90 | C6 |
| HF500-132-4 | 258 | 132 | 240 | 110 | |
| HF500-160-4 | 315 | 160 | 270 | 132 | C7 |
| HF500-185-4 | 365 | 185 | 320 | 160 | |
| HF500-220-4 | 435 | 220 | 372 | 185 | C8 |
| HF500-250-4 | 485 | 250 | 440 | 220 | |
| HF500-315-4 | 610 | 315 | 490 | 250 | C9 |
| HF500-355-4 | 665 | 355 | 580 | 315 | |
| HF500-400-4 | 720 | 400 | 634 | 350 | |
| HF500-500-4 | 920 | 500 | 745 | 440 | C10 |
| HF500-630-4 | 1100 | 630 | 940 | 560 | C11 |
| HF500-800-4 | 1290 | 800 | 1140 | 704 | |

150% 5 1
200% 5 5
5.5kW-30kW ; 37kW

### HF500-4

| | | |
|---|---|---|
| | | 380V~460V |
| | | 50/60Hz |
| | | -15%~+10% |
| | | 0~ |
| | | 0~300Hz |
| | | |
| | | 1kHz~10kHz |
| | | 0.01Hz x0.1% |
| | | (VC) (SVC) V/F |
| | V/F | |
| | | PG PG |
| | | 300Hz |
| | | 0Hz/200%(VC SVC) 0.8Hz/150%(V/F) |
| | | 1:500(SVC) 1:1000(VC) |
| | | ±0.02% (VC) ±0.2% (SVC) ±0.5% (V/F) |
| | | 5 150% 1 200% 5 |
| | | |
| | | |
| | | |
| | | |
| | PID | |
| | | 8 2 -10V~+10V 0mA/4mA~20mA |
| | | 5 3 2 2<br>0~+10V 0mA/4mA~20mA |
| | LCD | |

### HF500B-4

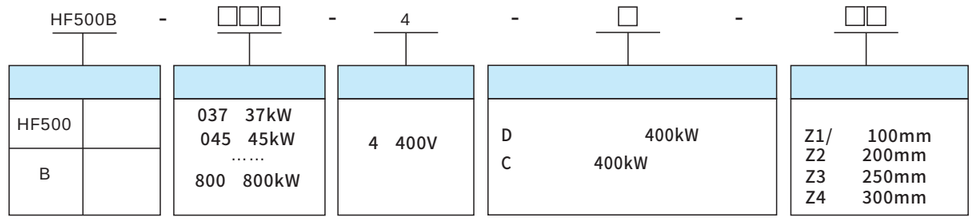


D 400kW
C 400kW

D 400kW
C 400kW

Z1/ 100mm
Z2 200mm
Z3 250mm
Z4 300mm

1. 1410A
2. ۵ص

## HF500A-4

| | kW | kVA | A | A |
|---|---|---|---|---|
| HF500A-075-4-D<br>HF500A-075-4-F<br>HF500A-075-4-C1<br>HF500A-075-4-C2<br>HF500A-075-4-C3<br>HF500A-075-4-C4 | 75 | 79 | 120 | 121 |
| HF500A-132-4-D<br>HF500A-132-4-F<br>HF500A-132-4-C1<br>HF500A-132-4-C2<br>HF500A-132-4-C3<br>HF500A-132-4-C4 | 132 | 139 | 211 | 213 |
| HF500A-250-4-D<br>HF500A-250-4-F<br>HF500A-250-4-C<br>HF500A-250-4-C1<br>HF500A-250-4-C2<br>HF500A-250-4-C3<br>HF500A-250-4-C4 | 250 | 263 | 400 | 403 |
| HF500A-315-4-D<br>HF500A-315-4-F<br>HF500A-315-4-C<br>HF500A-315-4-C1<br>HF500A-315-4-C2<br>HF500A-315-4-C3<br>HF500A-315-4-C4 | 315 | 332 | 504 | 508 |
| HF500A-400-4-D<br>HF500A-400-4-F<br>HF500A-400-4-C<br>HF500A-400-4-C1<br>HF500A-400-4-C2<br>HF500A-400-4-C3<br>HF500A-400-4-C4 | 400 | 421 | 640 | 645 |
| HF500A-500-4-C<br>HF500A-500-4-C1<br>HF500A-500-4-C4 | 500 | 526 | 760 | 767 |
| HF500A-630-4-C<br>HF500A-630-4-C1<br>HF500A-630-4-C4 | 630 | 663 | 958 | 965 |
| HF500A-800-4-C<br>HF500A-800-4-C1<br>HF500A-800-4-C4 | 800 | 842 | 1216 | 1226 |
| HF500A-1200-4-C | 1200 | 1263 | 1824 | 1838 |
| HF500A-1600-4-C | 1600 | 1684 | 2432 | 2451 |
| HF500A-2000-4-C | 2000 | 2105 | 3040 | 3064 |
| HF500A-2400-4-C | 2400 | 2526 | 3648 | 3676 |

DC620V

## HF500A-4

| | | |
|---|---|---|
| | | 380V 460V |
| | | 50 / 60Hz |
| | | -15% +10% |
| | | <AC320V 15ms |
| | | AFE |
| | | |
| | | 0.999 |
| | | 3% |
| | | 5 150% 1 |
| | | 57 |
| | | 3 |

## 2.2 HF500 690V

### HF500LC-6

HF500LC - XXX S

| | |
|---|---|
| HF500 | |
| LC | |

| | |
|---|---|
| 160 | 160 |
| 250 | 250 |
| ..... | |
| 1120 | 112 |

690V

| | |
|---|---|
| F | |
| F G3 | 6 |

HF500LC-6

LC

6: 690V

F HF500LC-6 G4 G5

12

S G3 6

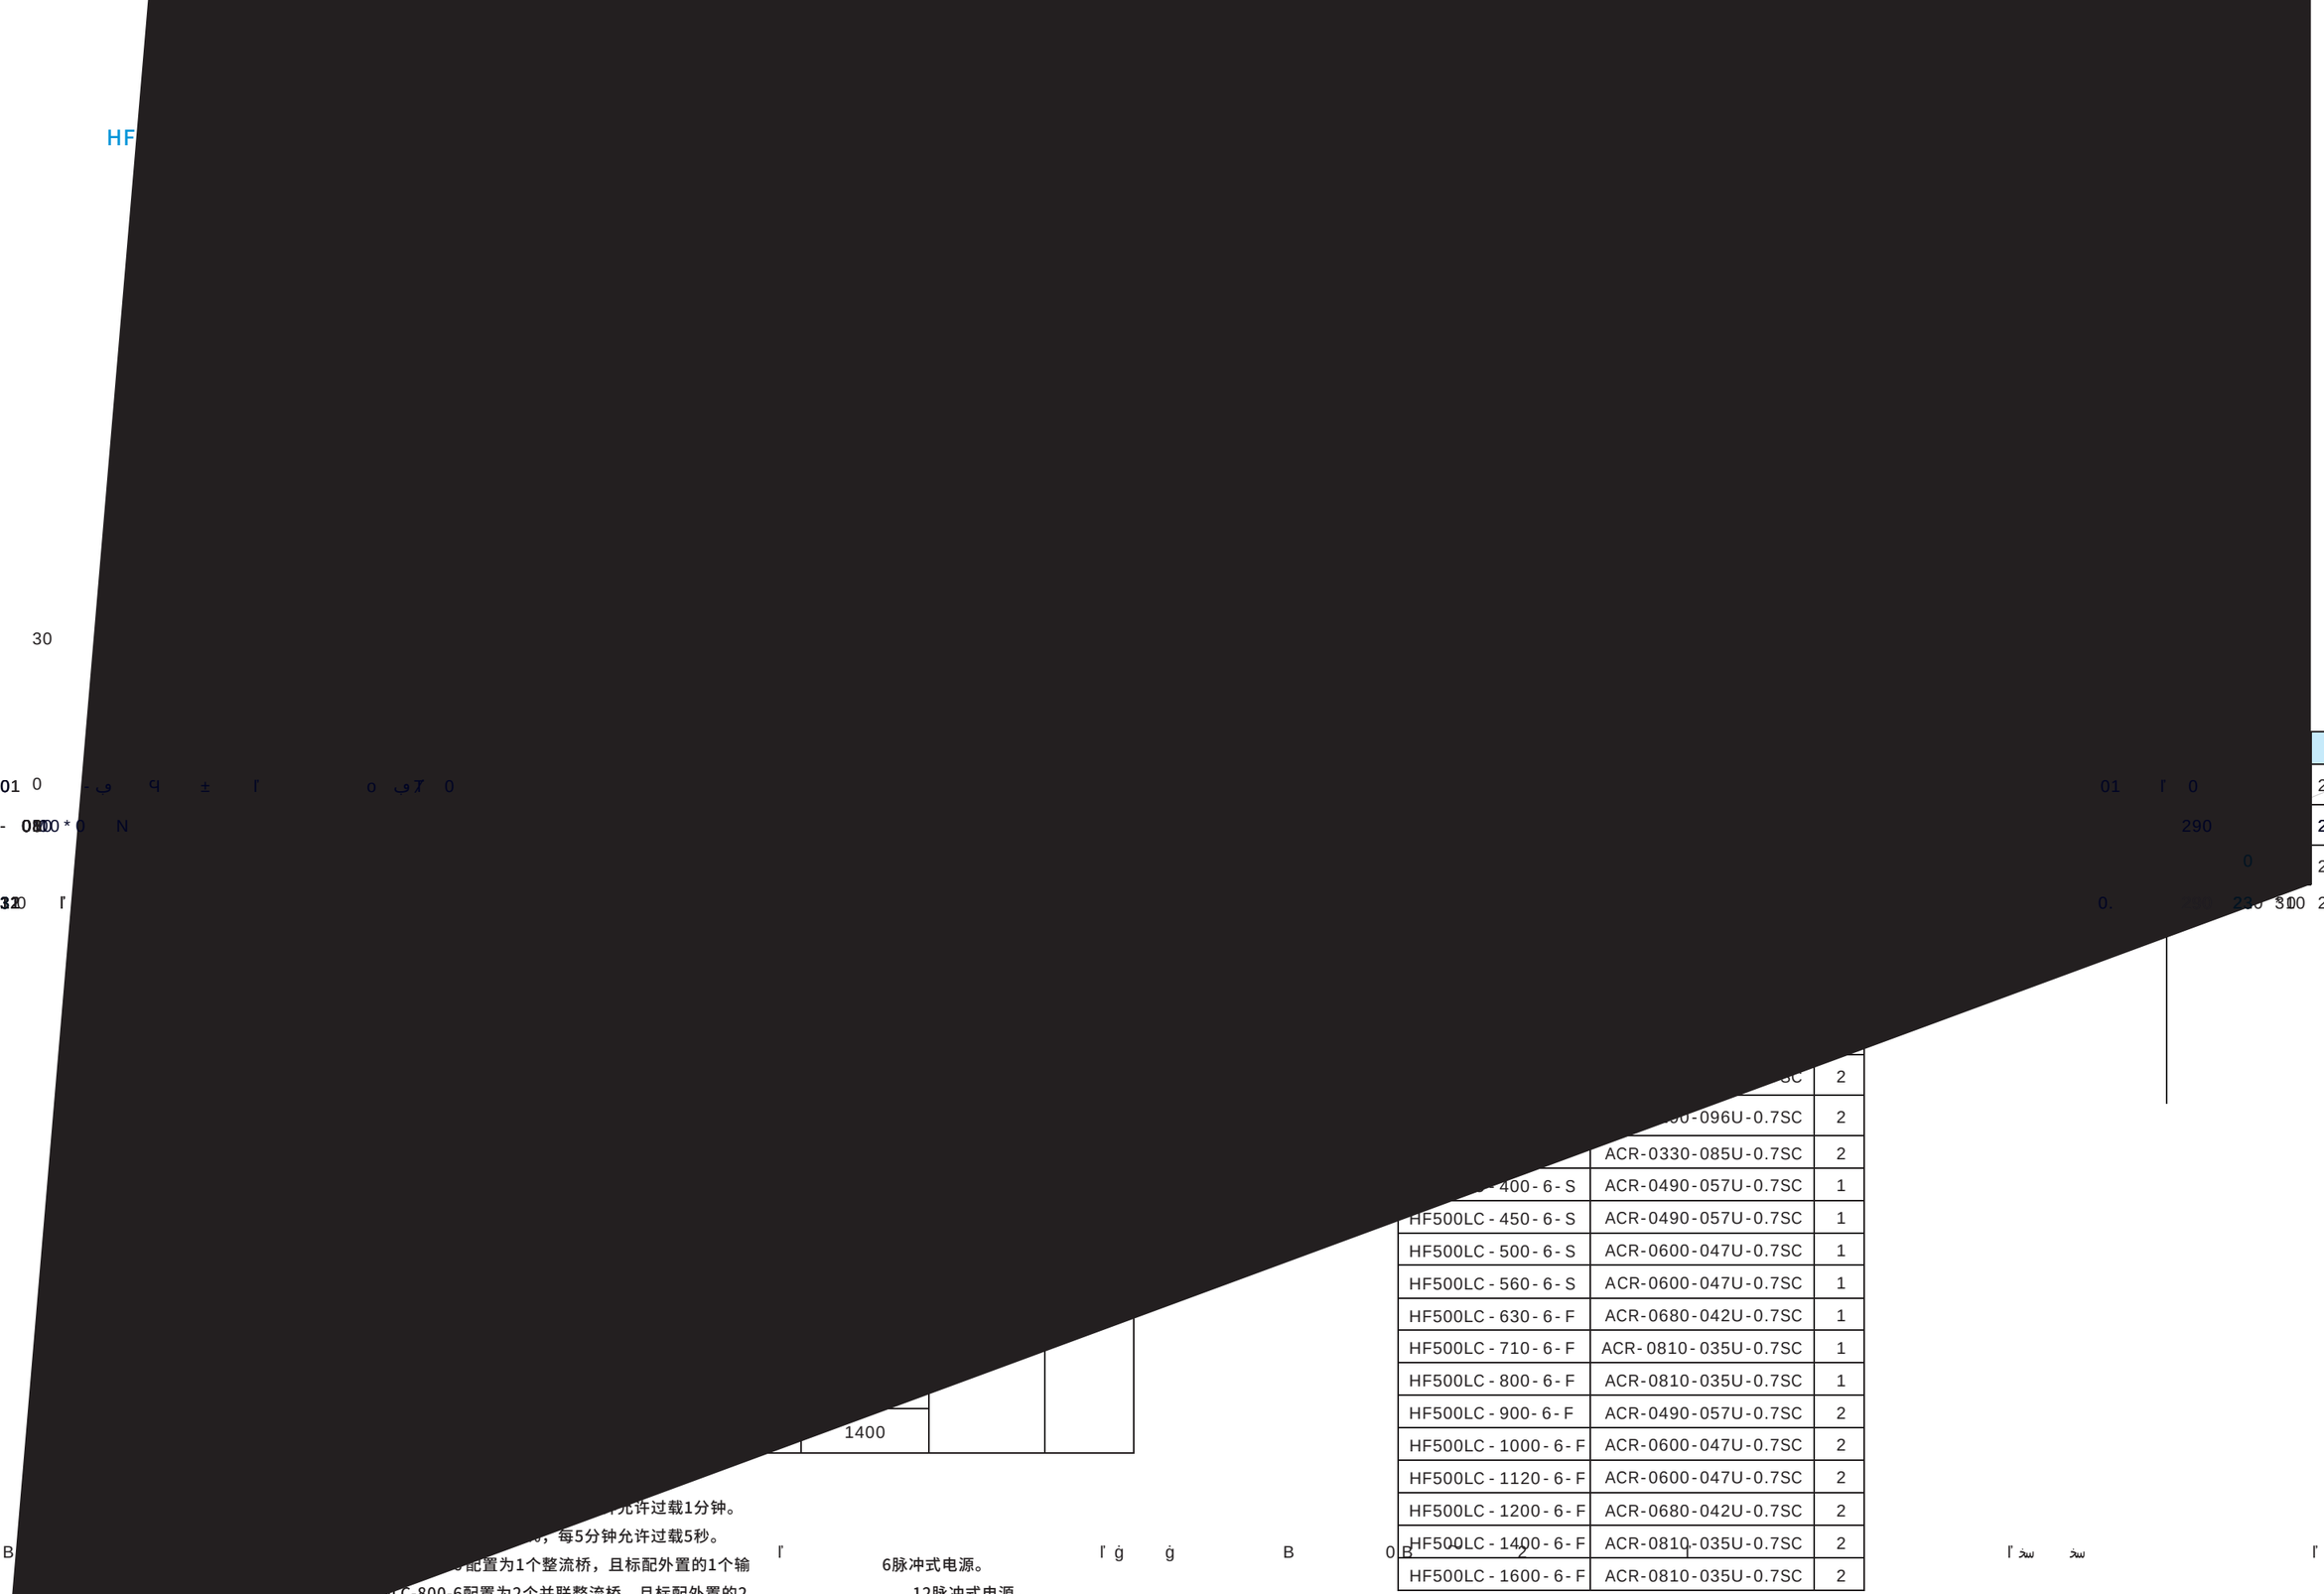


| | | |
|---|---|---|
| HF500LC - 400 - 6 - S | ACR-0490-057U-0.7SC | 1 |
| HF500LC - 450 - 6 - S | ACR-0490-057U-0.7SC | 1 |
| HF500LC - 500 - 6 - S | ACR-0600-047U-0.7SC | 1 |
| HF500LC - 560 - 6 - S | ACR-0600-047U-0.7SC | 1 |
| HF500LC - 630 - 6 - F | ACR-0680-042U-0.7SC | 1 |
| HF500LC - 710 - 6 - F | ACR-0810-035U-0.7SC | 1 |
| HF500LC - 800 - 6 - F | ACR-0810-035U-0.7SC | 1 |
| HF500LC - 900 - 6 - F | ACR-0490-057U-0.7SC | 2 |
| HF500LC - 1000 - 6 - F | ACR-0600-047U-0.7SC | 2 |
| HF500LC - 1120 - 6 - F | ACR-0600-047U-0.7SC | 2 |
| HF500LC - 1200 - 6 - F | ACR-0680-042U-0.7SC | 2 |
| HF500LC - 1400 - 6 - F | ACR-0810-035U-0.7SC | 2 |
| HF500LC - 1600 - 6 - F | ACR-0810-035U-0.7SC | 2 |

| D | W1 | A*B |
|---|---|---|
| 214 | 122 | 11*18 |
| 214 | 122 | 11*18 |
| 214 | 132 | 11*18 |

6脉冲式电源。

12脉冲式电源。

1个输入电抗器，适用于6脉冲式电源。

2个输入电抗器，适用于12脉冲式电源。

## HF500-6

| | | | 2 , ő | | |
|---|---|---|---|---|---|
| | [A] | į [kW] | ž [A] | Ş [kW] | |
| HF500-**055**-6 | 68 | 55 | 54 | 45 | |
| HF500-075-6 | 86 | 75 **80** | 62 | 55 | |
| HF500-090-6 | 108 | 90 | 86 | [illegible] | |
| HF500-110-6 | 125 | 110 | 95 0 | 90 | |
| HF500-132-6 | 155 | 132 | 131 | 110 | |
| HF500-**160**-6 | 180 | 160 | 147 | 132 | |

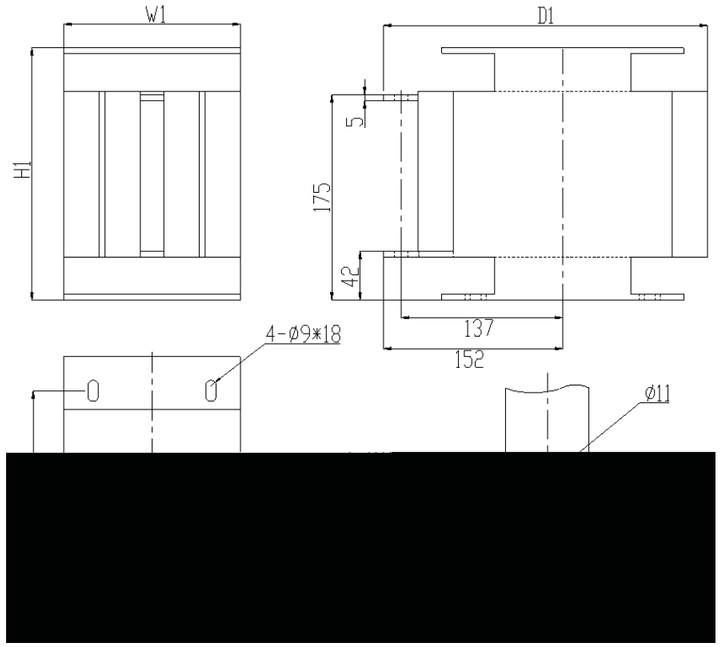


D2

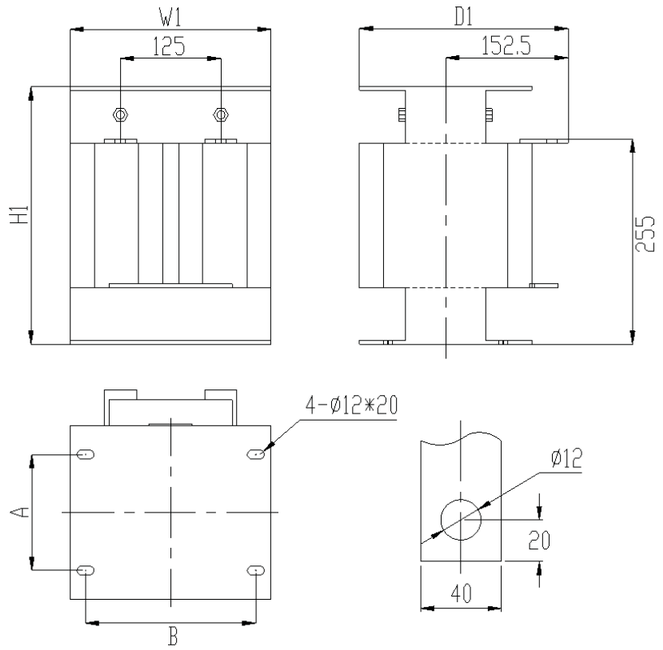


D3



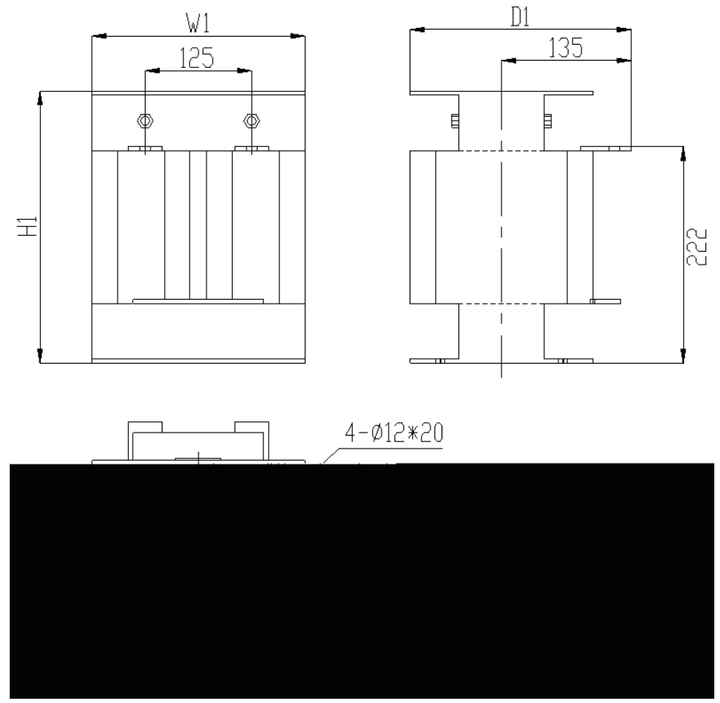


D4

| | | ( mm) | | | ( mm) | | | 8.8 | | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | W1 | D1 | A | B | | | | |
| D1 | 55 kW | 250 | 200 | 190 | 120 | 175 | 4-ϕ11*18 | M8 | ϕ13 | 30 |
| | 75 kW | | | | | | | | | |
| | 90 kW | | | | | | | | | |
| | 110 kW | | | | | | | | | |
| | 132 kW | | | | | | | | | |
| D2 | 160 kW | 215 | 150 | 275 | 148 | 100 | 4-ϕ9*18 | M8 | ϕ11 | 40 |
| | 200 kW | | | | | | | | | |
| | 250 kW | | | | | | | | | |
| D3 | 280 kW | 325 | 250 | 260 | 144 | 212 | 4-ϕ12*20 | M10 | ϕ13 | 50 |
| | 315 kW | | | | | | | | | |
| | 355 kW | | | | | | | | | |
| D4 | 400 kW | 310 | 250 | 230 | 160 | 212 | 4-ϕ12*20 | M10 | ϕ12 | 60 |
| | 450 kW | | | | | | | | | |
| | 500 kW | | | | | | | | | |
| | 560 kW | | | | | | | | | |

## HF500B-6

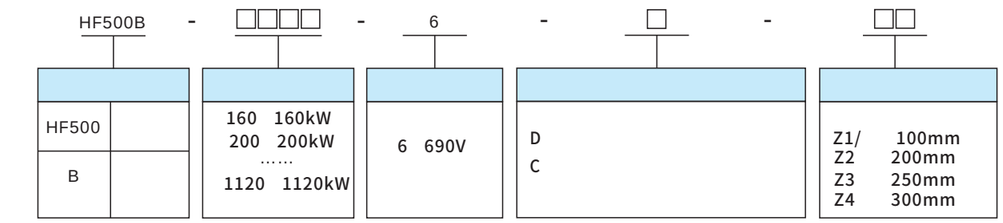


D 560kW

C 560kW

Z1/ 100mm

Z2 200mm

Z3 250mm

Z4 300mm

1. 1123A

2.

3.

4.

1. HF500B-800-6-C HF500B-800-6-C-Z1 800kW 100mm，
400kW

2. HF500B-800-6-C-Z3， 800kW 250mm， 400kW

## HF500B-6 800-

## HF500A-6

| | [kW] | [kVA] | [A] | [A] |
|---|---|---|---|---|
| HF500A -160-6-D<br>HF500A -160-6-F<br>HF500A -160-6-C | 160 | 169 | 141 | 153 |
| HF500A -250-6-D<br>HF500A -250-6-F<br>HF500A -250-6-C | 250 | 264 | 221 | 239 |
| HF500A -315-6-D<br>HF500A -315-6-F<br>HF500A -315-6-C | 315 | 332 | 278 | 301 |
| HF500A -400-6-D<br>HF500A -400-6-F<br>HF500A -400-6-C | 400 | 422 | 353 | 382 |
| HF500A -500-6-D<br>HF500A -500-6-F<br>HF500A -500-6-C | 500 | 527 | 441 | 477 |
| HF500A -630-6-C | 630 | 664 | 528 | 570 |
| HF500A -800-6-C | 800 | 843 | 670 | 724 |
| HF500A -1000-6-C | 1000 | 1053 | 837 | 905 |
| HF500A -1500-6-C | 1500 | 1579 | 1256 | 1358 |
| HF500A -2000-6-C | 2000 | 2106 | 1674 | 1810 |
| HF500A -2500-6-C | 2500 | 2632 | 2092 | 2262 |
| HF500A -3000-6-C | 3000 | 3158 | 2511 | 2715 |

1050V

## HF500A-6

| | | |
|---|---|---|
| | | 660V 690V |
| | | 50 / 60 Hz |
| | | -15% +10% |
| | | <AC 560V 15ms |
| | | AFE |
| | | Profibus DP |
| | | 0.999 |
| | | 4% |
| | | 5 150% 1 |
| | | 1000V 1150V |
| | | 2 5kHz |



# 3

## 3.1 HF500 400V

### HF500-4

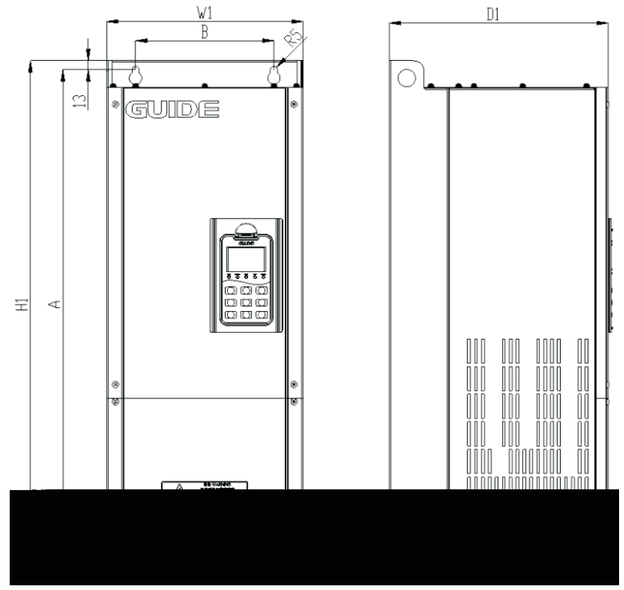


C1~C8

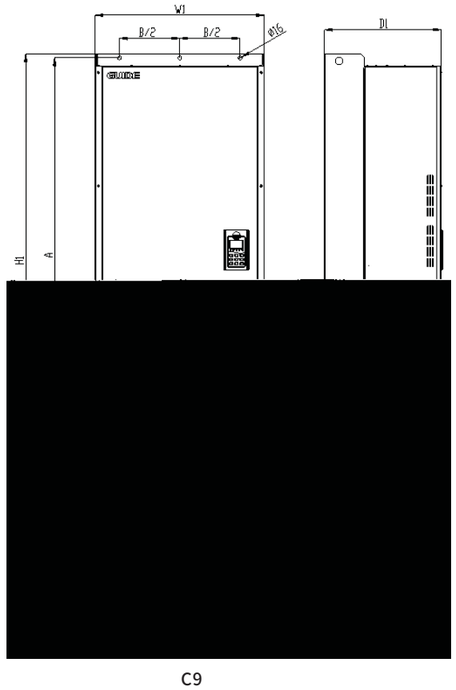


C9

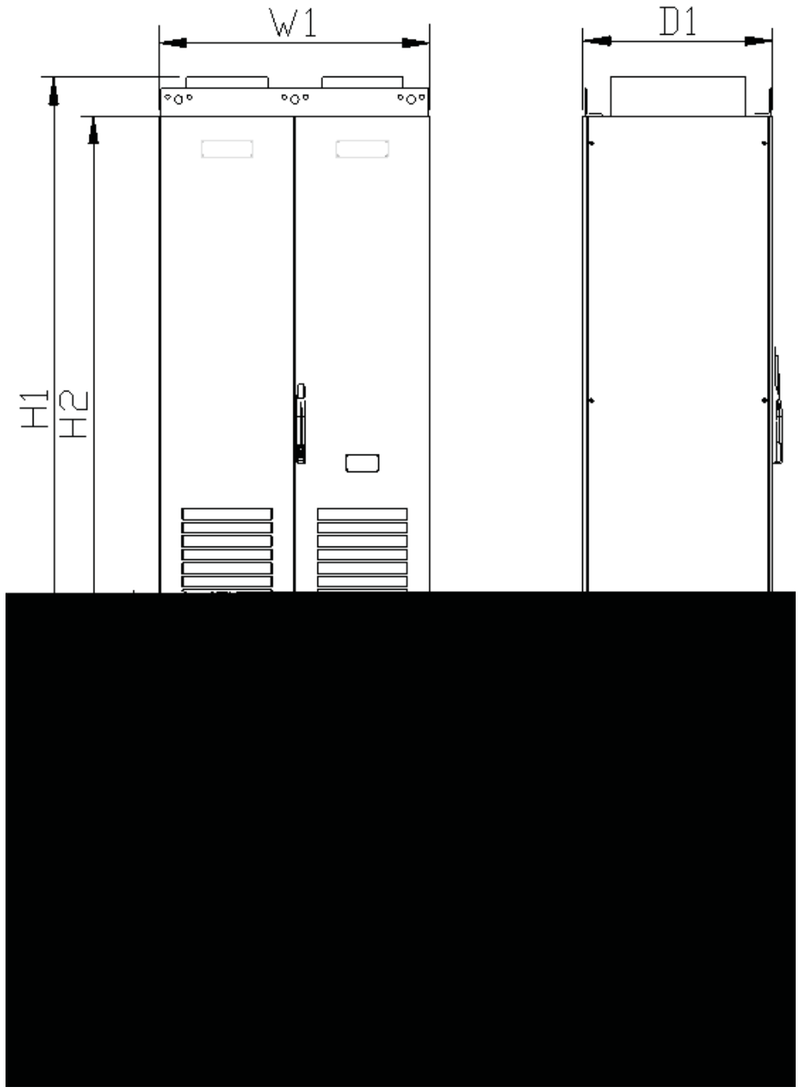


C10

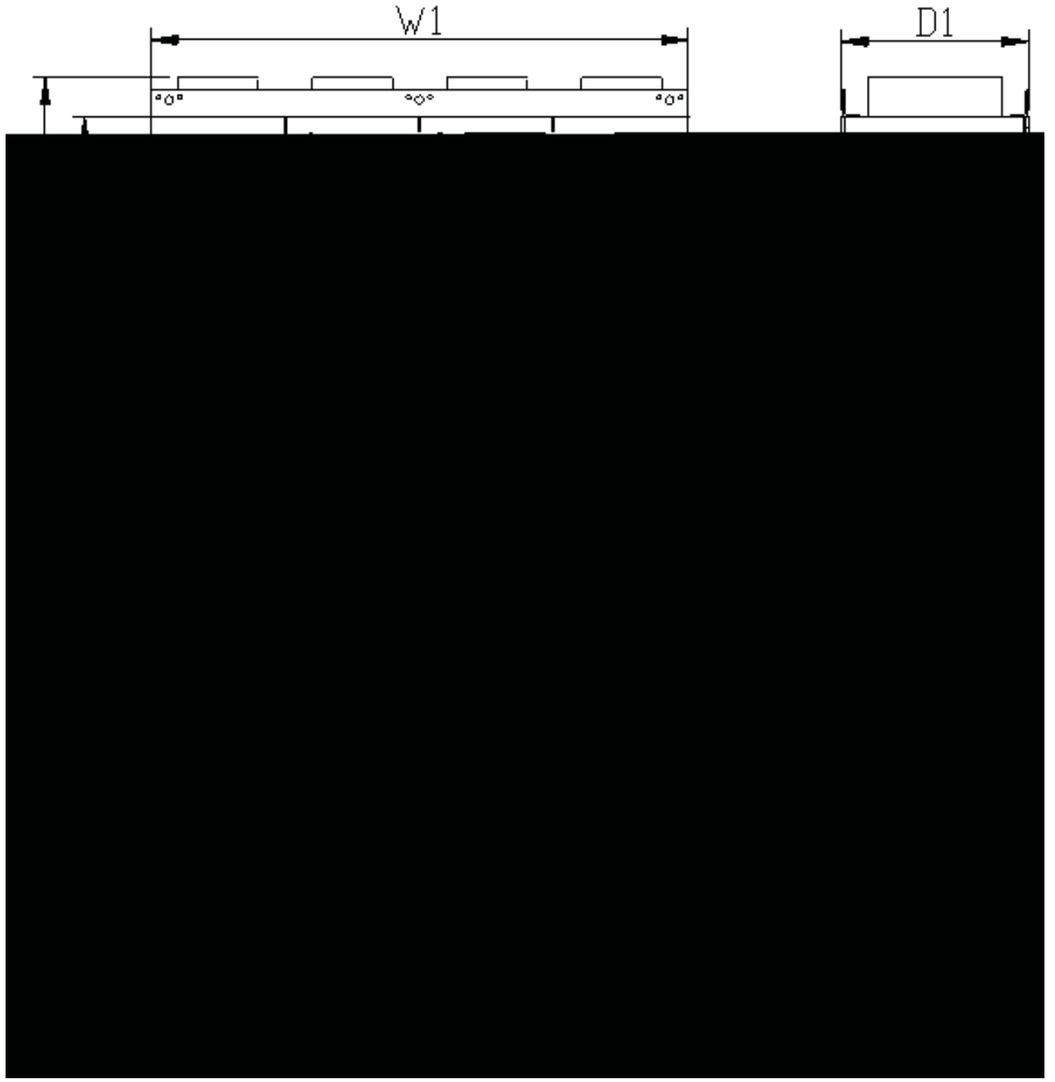


C11

C1~C9

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | (kW) | ( mm) | | | | 8.8 kg | |
| | | | | H1 | W1 | D1 | A | B | |

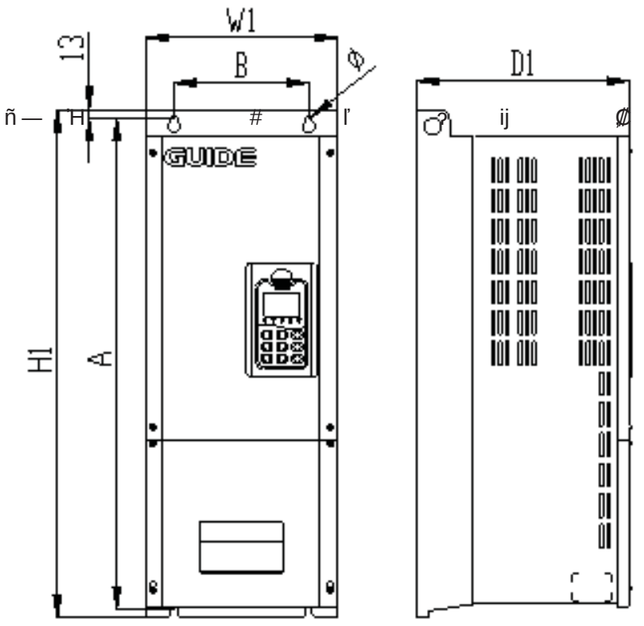

## HF500B-037-4-D HF500B-400-4-D

| | mm | | | mm | | | 8.8 | kg |
|---|---|---|---|---|---|---|---|---|
| | H1 | W1 | D1 | A | B | | | |
| HF500B-037-4-D | 750 | 284 | 316 | 725 | 200 | 4-φ10 | 4-M8 | 30 |
| HF500B-045-4-D | | | | | | | | |
| HF500B-055-4-D | | | | | | | | |
| HF500B-075-4-D | 850 | 300 | 305 | 825 | 225 | 4-φ10 | 4-M8 | 45 |
| HF500B-090-4-D | | | | | | | | |
| HF500B-110-4-D | 775 | 393 | 365 | 750 | 300 | 4-φ12 | 4-M10 | 80 |
| HF500B-132-4-D | | | | | | | | |
| HF500B-160-4-D | 1235 | 397 | 436 | 1210 | 300 | 4-φ14 | 4-M12 | 120 |
| HF500B-185-4-D | | | | | | | | |
| HF500B-200-4-D | | | | | | | | |
| HF500B-220-4-D | 1300 | 415 | 472 | 1268.5 | 300 | 4-φ16 | 4-M14 | 140 |
| HF500B-250-4-D | | | | | | | | |
| HF500B-315-4-D | 1700 | 500 | 485 | 1682.5 | 350 | 3-φ14 | 7-M12 | 220 |
| HF500B-355-4-D | | | | | | | | |
| HF500B-400-4-D | | | | | | | | |

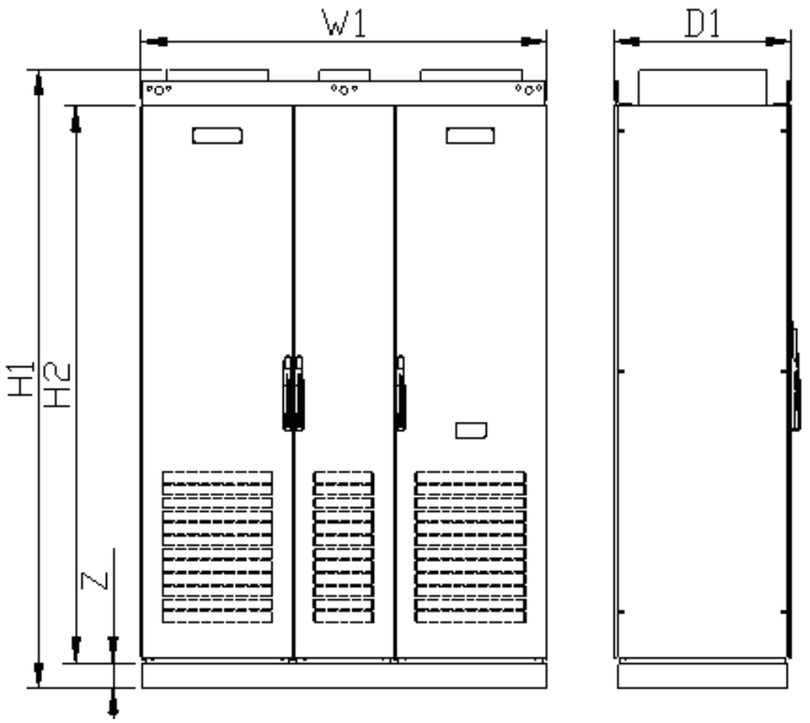




## HF500B-C

| | | mm | | | | | kg |
|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | D1 | Z | |
| 1 | HF500B-500-4-C<br>HF500B-500-4-C-Z1 | 2450 | 2200 | 1000 | 700 | 100 | 930 |
| 2 | HF500B-500-4-C-Z2 | 2550 | 2200 | 1000 | 700 | 200 | 930 |
| 3 | HF500B-500-4-C-Z3 | 2600 | 22 00 | 1000 | 700 | 250 | 930 |
| 4 | HF500B-500-4-C-Z4 | 2650 | 2200 | 1000 | 700 | 300 | 930 |
| 5 | HF500B-630-4-C<br>HF500B-630-4-C-Z1<br>HF500B-800-4-C<br>HF500B-800-4-C-Z1 | 2450 | 2200 | 1600 | 700 | 100 | 1200 |
| 6 | HF500B-630-4-C-Z2<br>HF500B-800-4-C-Z2 | 2550 | 2200 | 1600 | 700 | 200 | 1200 |
| 7 | HF500B-630-4-C-Z3<br>HF500B-800-4-C-Z3 | 2600 | 2200 | 1600 | 700 | 250 | 1200 |
| 8 | HF500B-630-4-C-Z4<br>HF500B-800-4-C-Z4 | 2650 | 2200 | 1600 | 700 | 300 | 1200 |

## HF500A-4

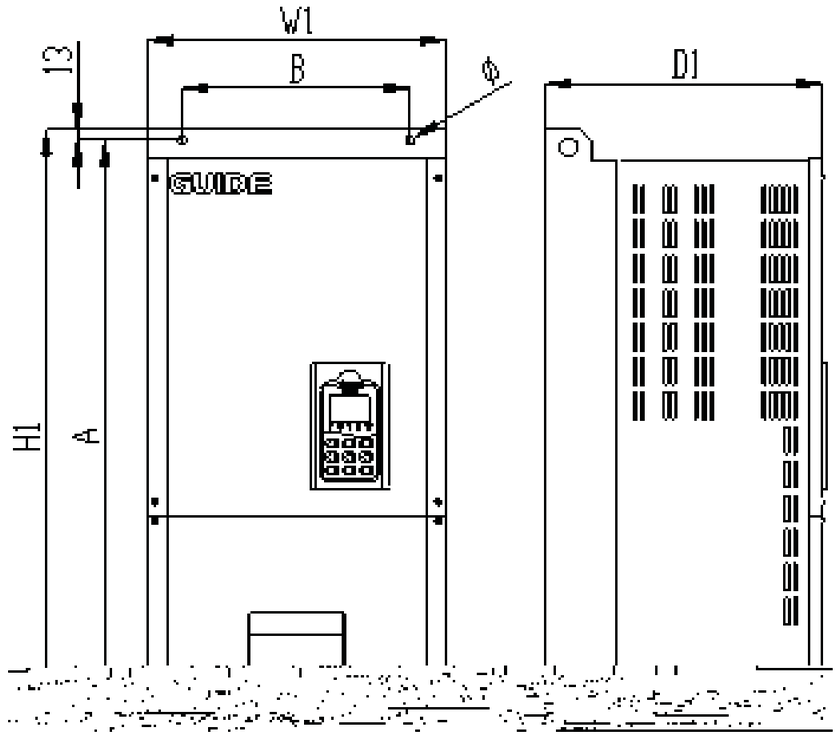


HF500A-132-4-D~HF500A-250-4-D

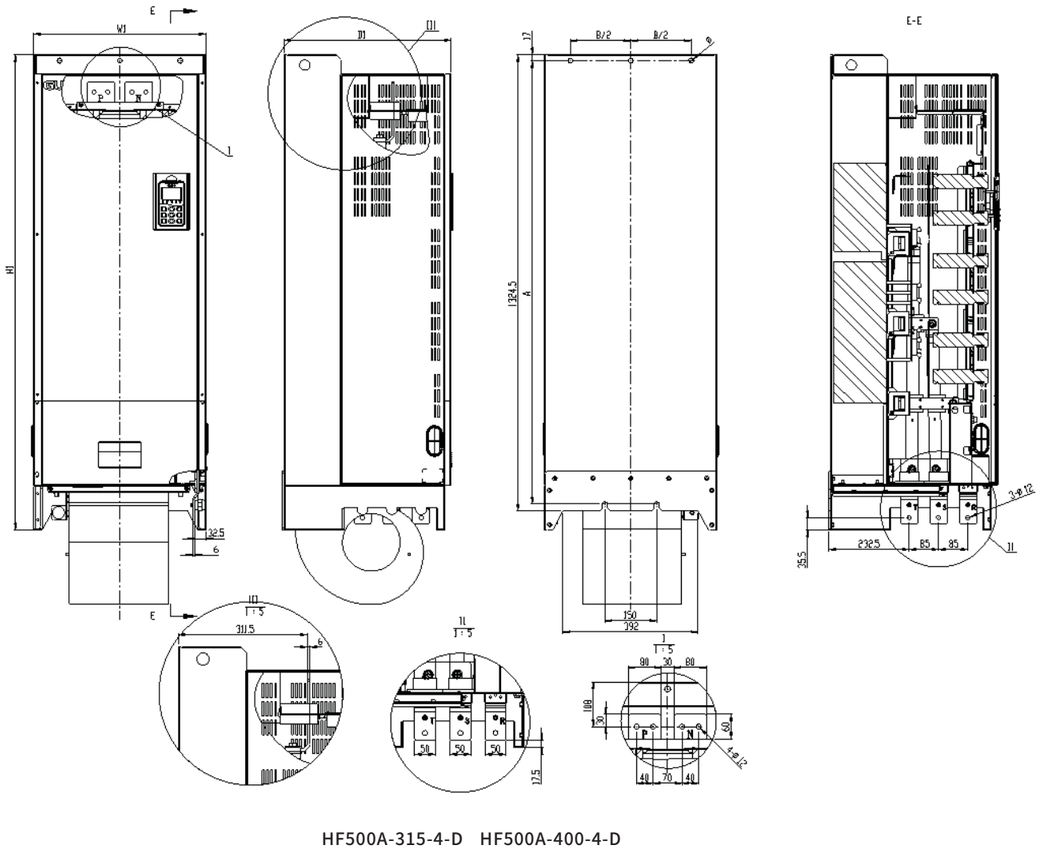


HF500A-315-4-D HF500A-400-4-D

## 75kW~400kW

| | | mm) | | | mm) | | | 8.8 | kg |
|---|---|---|---|---|---|---|---|---|---|
| | | H1 | W1 | D1 | A | B | | | |
| 1 | HF500A-075-4-D | 850 | 300 | 305 | 825 | 225 | 4-φ10 | 4-M8 | 45 |
| 2 | HF500A-132-4-D | 775 | 393 | 365 | 750 | 300 | 4-φ12 | 4-M10 | 80 |
| 3 | HF500A-250-4-D | 1300 | 415 | 472 | 1268.5 | 300 | 4-φ16 | 4-M14 | 140 |
| 4 | HF500A-315-4-D<br>HF500A-400-4-D | 1379.5 | 500 | 485 | 1287.5 | 350 | 5-φ14 | 5-M12 | 230 |



## HF500-4

C IP20

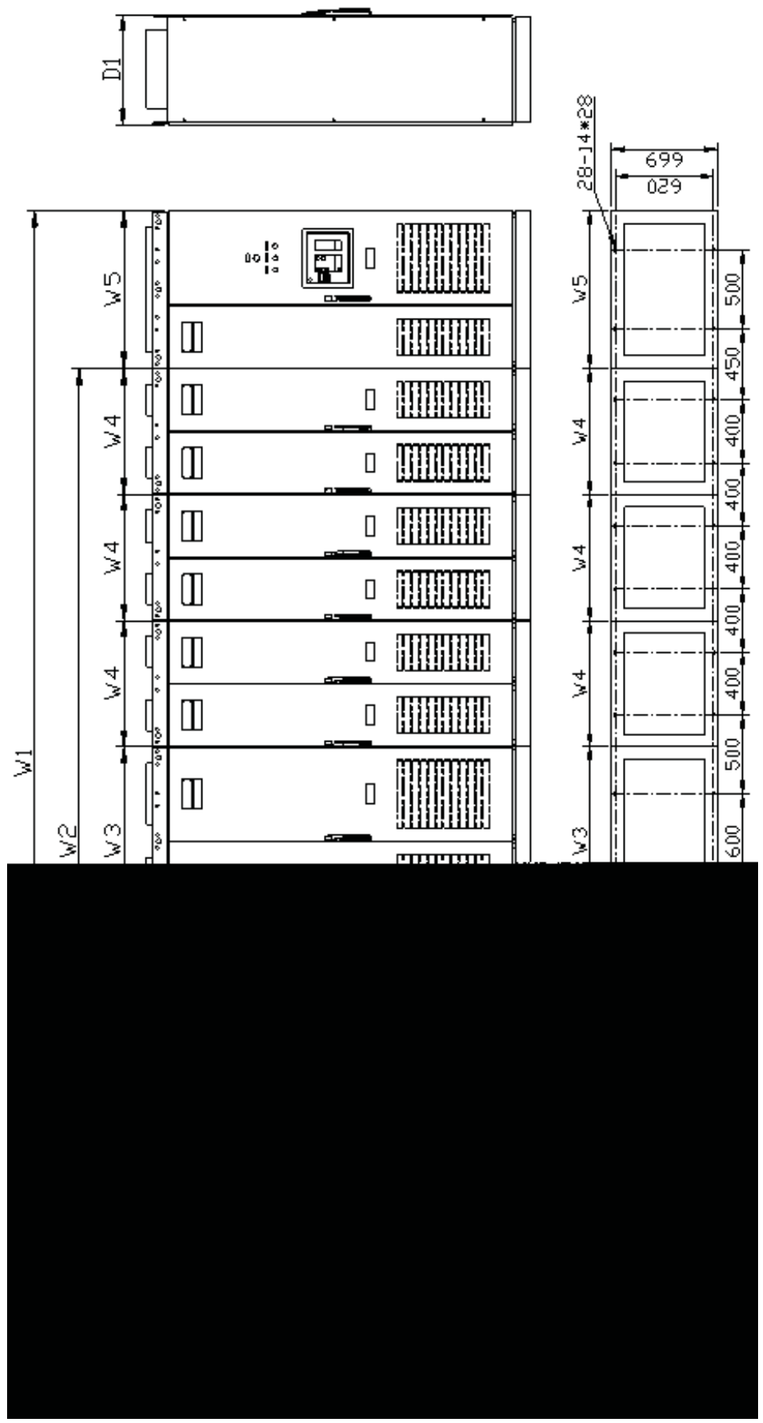

## 250kW 315kW 400kW

| | | mm) | | | | | | | | | | (kg) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W 4 | W 5 | W6 | D1 | Z | |
| 1 | HF500A -250 -4 -C<br>HF500A -250 -4 -C-Z1<br>HF500A -315 -4 -C<br>HF500A -315 -4 -C-Z1<br>HF500A -400 -4 -C<br>HF500A -400 -4 -C-Z1 | 2450 | 2200 | / | 1000 | / | / | / | / | 700 | 100 | 1000 |
| 2 | HF500A -250 -4 -C-Z2<br>HF500A -315 -4 -C-Z2<br>HF500A -400 -4 -C-Z2 | 2550 | 2200 | / | 1000 | / | / | / | / | 700 | 200 | 1000 |
| 3 | HF500A -250 -4 -C-Z3<br>HF500A -315 -4 -C-Z3<br>HF500A -400 -4 -C-Z3 | 2600 | 2200 | / | 1000 | / | / | / | / | 700 | 250 | 1000 |
| 4 | HF500A -250 -4 -C-Z4<br>HF500A -315 -4 -C-Z4<br>HF500A -400 -4 -C-Z4 | 2650 | 2200 | / | 1000 | / | / | / | / | 700 | 300 | 1000 |
| 5 | HF500A -250 -4 -C+P<br>HF500A -250 -4 -C-Z1+P<br>HF500A -315 -4 -C+P<br>HF500A -315 -4 -C-Z1+P<br>HF500A -40 0-4 -C+P<br>HF500A -400 -4 -C-Z1+P | 2450 | 2200 | 1400 | 1000 | 400 | / | / | / | 700 | 100 | 1150 |
| 6 | HF500A -250 -4 -C-Z2+P<br>HF500A -315 -4 -C-Z2+P<br>HF500A -400 -4 -C-Z2+P | 2550 | 2200 | 1400 | 1000 | 400 | / | / | / | 700 | 200 | 1150 |
| 7 | HF500A -250 -4 -C-Z3+P<br>HF500A -315 -4 -C-Z3 +P<br>HF500A -400 -4 -C-Z3+P | 2600 | 2200 | 1400 | 1000 | 400 | / | / | / | 700 | 250 | 1150 |
| 8 | HF500A -250 -4 -C-Z4+P<br>HF500A -315 -4 -C-Z4+P<br>HF500A -400 -4 -C-Z4+P | 2650 | 2200 | 1400 | 1000 | 400 | / | / | / | 700 | 300 | 1150 |



## 500kW 630kW 800kW

| | | mm) | | | | | | | | | | (kg) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W 4 | W 5 | W6 | D1 | Z | |
| 1 | HF500A -500 -4 -C<br>HF500A -500 -4 -C-Z1<br>HF500A -630 -4 -C<br>HF500A -630 -4 -C-Z1<br>HF500A -8 00 -4 -C<br>HF500A -8 00 -4 -C-Z1 | 2450 | 2200 | / | 2000 | 1200 | 800 | / | / | 700 | 100 | 1100 |
| 2 | HF500A -500 -4 -C-Z2<br>HF500A -630 -4 -C-Z2<br>HF500A -800 -4 -C-Z2 | 2550 | 2200 | / | 2000 | 1200 | 800 | / | / | 700 | 200 | 1100 |
| 3 | HF500A -500 -4 -C-Z3<br>HF500A -630 -4 -C-Z3<br>HF500A -800 -4 -C-Z3 | 2600 | 2200 | / | 2000 | 1200 | 800 | / | / | 700 | 250 | 1100 |
| 4 | HF500A -500 -4 -C-Z4<br>HF500A -630 -4 -C-Z4<br>HF500A -800 -4 -C-Z4 | 2650 | 2200 | / | 2000 | 1200 | 800 | / | / | 700 | 300 | 1100 |
| 5 | HF500A -500 -4 -C+P<br>HF500A -500 -4 -C-Z1+P<br>HF500A-630 -4 -C+P<br>HF500A -630 -4 -C-Z1+P<br>HF500A -8 00-4 -C+P<br>HF500A -8 00-4 -C-Z1+P | 2450 | 2200 | 2400 | 2000 | 1200 | 800 | 400 | / | 700 | 100 | 1500 |
| 6 | HF500A -500 -4 -C-Z2+P<br>HF500A -630 -4 -C-Z2+P<br>HF500A -800 -4 -C-Z2+P | 2550 | 2200 | 2400 | 2000 | 1200 | 800 | 400 | / | 700 | 200 | 1500 |
| 7 | HF500A -500 -4 -C-Z3+P<br>HF500A -630 -4 -C-Z3+P<br>HF500A -800 -4 -C-Z3+P | 2600 | 2200 | 2400 | 2000 | 1200 | 800 | 400 | / | 700 | 250 | 1500 |
| 8 | HF500A -500 -4 -C-Z4+P<br>HF500A -630 -4 -C-Z4+P<br>HF500A -800 -4 -C-Z4+P | 2650 | 2200 | 2400 | 2000 | 1200 | 800 | 400 | / | 700 | 300 | 1500 |

## 1200kW

m

| | | mm) | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W 4 | W 5 | W 6 | D1 | Z | |
| 1 | HF500A-1200 -4-C<br>HF500A-1200-4-C-Z1 | 2450 | 2200 | / | 3000 | 1200 | 1000 | 800 | / | 700 | 100 | 2300 |
| 2 | HF500A-1200-4-C-Z2 | 2550 | 2200 | / | 3000 | 1200 | 1000 | 800 | / | 700 | 200 | 2300 |
| 3 | HF500A-1200-4-C-Z3 | 2600 | 2200 | / | 3000 | 1200 | 1000 | 800 | / | 700 | 250 | 2300 |
| 4 | HF500A-1200-4-C-Z4 | 2650 | 2200 | / | 3000 | 1200 | 1000 | 800 | / | 700 | 300 | 2300 |
| 5 | HF500A-1200-4-C+P<br>HF500A-1200-4-C-Z1+P | 2450 | 2200 | 3600 | 3000 | 1200 | 1000 | 800 | 600 | 700 | 100 | 2500 |
| 6 | HF500A-1200-4-C-Z2+P | 2550 | 2200 | 3600 | 3000 | 1200 | 1000 | 800 | 600 | 700 | 200 | 2500 |
| 7 | HF500A-1200-4-C-Z3+P | 2600 | 2200 | 3600 | 3000 | 1200 | 1000 | 800 | 600 | 700 | 250 | 2500 |
| 8 | HF500A-1200-4-C-Z4+P | 2650 | 2200 | 3600 | 3000 | 1200 | 1000 | 800 | 600 | 700 | 300 | 2500 |

## 1600kW

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W 4 | W 5 | W6 | D1 | | |

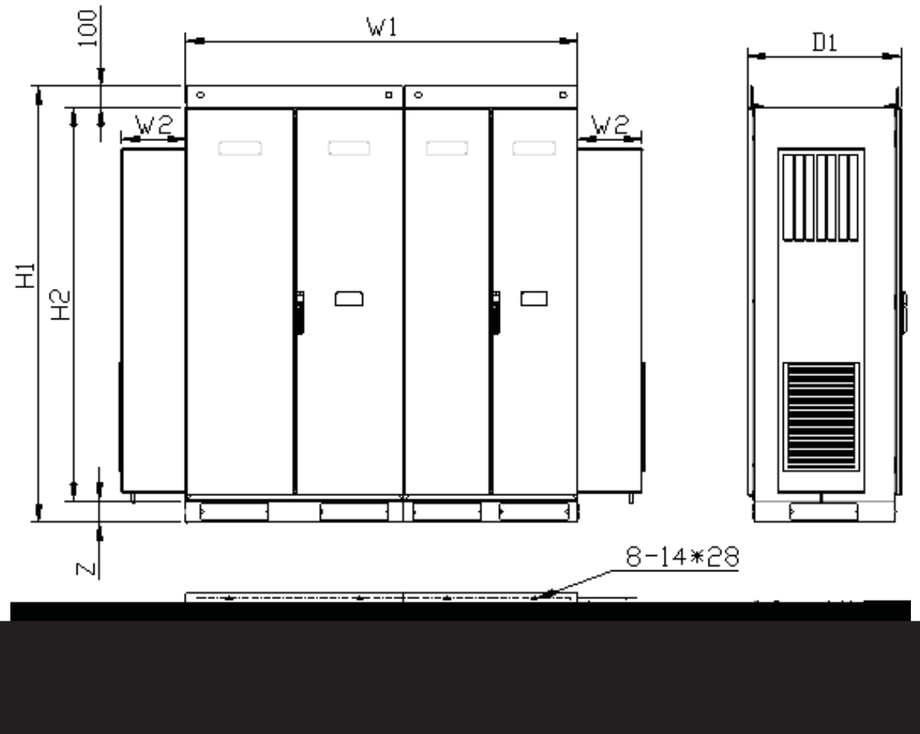


250kW~400kW C1

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | D1 | Z | |
| 1 | HF500A -250-4 -C1<br>HF500A -250-4 -C1-Z1 | 2000 | 1800 | 900 | 700 | 100 | 900 |
| 2 | HF500A -250-4 -C1-Z2 | 2100 | 1800 | 900 | 700 | 200 | 900 |
| 3 | HF500A -250-4 -C1-Z3 | 2150 | 1800 | 900 | 700 | 250 | 900 |
| 4 | HF500A -250-4 -C1-Z4 | 2200 | 1800 | 900 | 700 | 30 0 | 900 |
| 5 | HF500A -315-4 -C1<br>HF500A -315-4 -C1-Z1<br>HF500A -400 -4 -C1<br>HF500A -400 -4 -C1-Z1 | 2100 | 1900 | 1000 | 700 | 100 | 1000 |
| 6 | HF500A -315 -4 -C1-Z2<br>HF500A -400 -4 -C1-Z2 | 2200 | 1900 | 1000 | 700 | 200 | 1000 |
| 7 | HF500A -315 -4 -C1-Z3<br>HF500A -400 -4 -C1-Z3 | 2250 | 1900 | 1000 | 700 | 250 | 1000 |
| 8 | HF500A -3 15-4 -C1-Z4<br>HF500A -400 -4 -C1-Z4 | 2300 | 1900 | 1000 | 700 | 300 | 1000 |

500kW~800kW C1

| | | | | | | | (kg) |
|---|---|---|---|---|---|---|---|
| | | | | | | 100 | 80 |
| | | | | | 650 | 200 | 800 |
| | | | | | 650 | 250 | 800 |
| | | | | 900 | 650 | 300 | 80 0 |
| 5 | | | | 900 | 650 | 100 | 850 |
| 6 | | | 1500 | 900 | 650 | 200 | 850 |
| 7 | | | 1500 | 900 | 650 | 250 | 850 |
| 8 | | 1900 | 1500 | 900 | 650 | 300 | 850 |

## HF500-4 C2 C3

75kW~400kW C2 IP65 C3 IP65

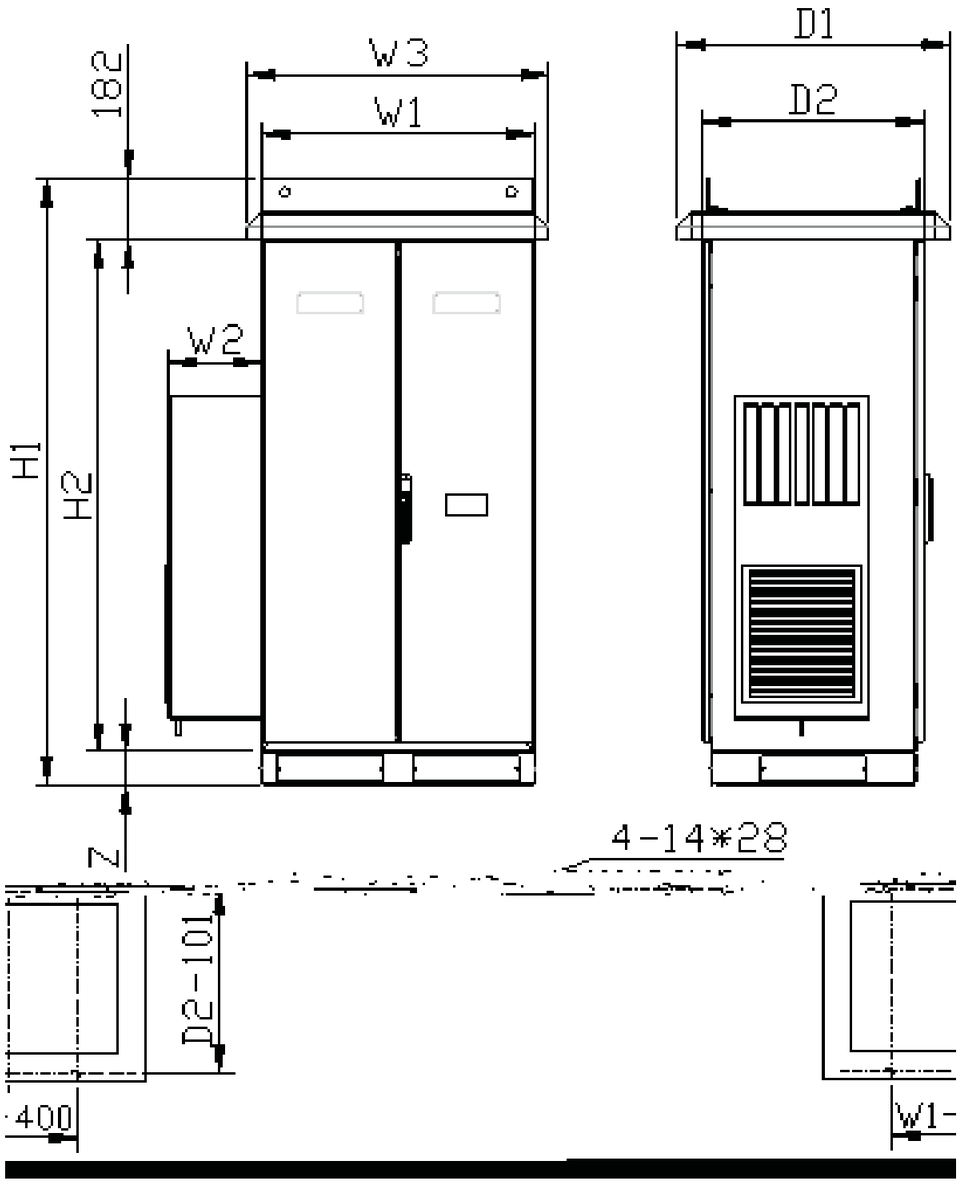


C3

## 75kW~400kW C2 C3

| | | mm) | | | | | | | (kg) |
|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W1 | W 3 | D1 | D2 | Z | |
| 1 | HF500A -0 75-4 -C2<br>HF500A -075-4 -C2-Z1<br>HF500A -0 75-4 -C3<br>HF500A -075-4 -C3-Z1 | 1782 | 1500 | 800 | 885 | 800 | 650 | 100 | 800 |
| 2 | HF500A -075-4 -C2-Z2<br>HF500A -075-4 -C3-Z2 | 1882 | 1500 | 800 | 885 | 800 | 650 | 200 | 800 |
| 3 | HF500A -075-4 -C2-Z3<br>HF500A -075-4 -C3-Z3 | 1932 | 1500 | 800 | 885 | 800 | 650 | 250 | 800 |
| 4 | HF500A -075-4 -C2-Z4<br>HF500A -075-4 -C3-Z4 | 1982 | 150 0 | 800 | 885 | 800 | 650 | 300 | 800 |
| 5 | HF500A -132 -4 -C2<br>HF500A -132 -4 -C2-Z1<br>HF500A -132 -4 -C3<br>HF500A -132 -4 -C3-Z1 | 1782 | 1500 | 900 | 985 | 800 | 650 | 100 | 850 |
| 6 | HF500A -132 -4 -C2-Z2<br>HF500A -132 -4 -C3-Z2 | 1882 | 1500 | 900 | 985 | 800 | 650 | 200 | 850 |
| 7 | HF500A -132 -4 -C2-Z3<br>HF500A -132 -4 -C3-Z3 | 1932 | 15 00 | 900 | 985 | 800 | 650 | 250 | 850 |
| 8 | HF500A -132 -4 -C2-Z4<br>HF500A -132 -4 -C3-Z4 | 1982 | 1500 | 900 | 985 | 800 | 650 | 300 | 850 |
| 9 | HF500A -250 -4 -C2<br>HF500A -250 -4 -C2-Z1<br>HF500A -250 -4 -C3<br>HF500A -250 -4 -C3-Z1 | 2082 | 1800 | 900 | 985 | 850 | 700 | 100 | 900 |
| 10 | HF500A -250 -4 -C2-Z2<br>HF500A -250 -4 -C3-Z2 | 2182 | 1800 | 900 | 985 | 850 | 700 | 200 | 900 |
| 11 | HF500A -250 -4 -C2-Z3<br>HF500A -250 -4 -C3-Z3 | 2232 | 1800 | 900 | 985 | 850 | 700 | 250 | 900 |
| 12 | HF500A -250 -4 -C2-Z4<br>HF500A -250 -4 -C3-Z4 | 2282 | 1800 | 900 | 985 | 850 | 700 | 300 | 900 |
| 13 | HF500A -315 -4 -C2<br>HF500A -315 -4 -C2-Z1<br>HF500A -315 -4 -C3<br>HF500A-315 -4 -C3-Z1<br>H F500A-400 -4 -C2<br>HF500A -400 -4 -C2-Z1<br>HF500A -400 -4 -C3<br>HF500A -400 -4 -C3-Z1 | 2182 | 1900 | 1000 | 1085 | 850 | 700 | 100 | 1000 |
| 14 | HF500A -315 -4 -C2-Z2<br>HF500A -315 -4 -C3-Z2<br>HF500A -400 -4 -C2-Z2<br>HF500A -400 -4 -C3-Z2 | 2282 | 1900 | 1000 | 1085 | 850 | 700 | 200 | 1000 |

W2

HF500-4 C4 C4 IP20

75kW~800kW C4 IP20

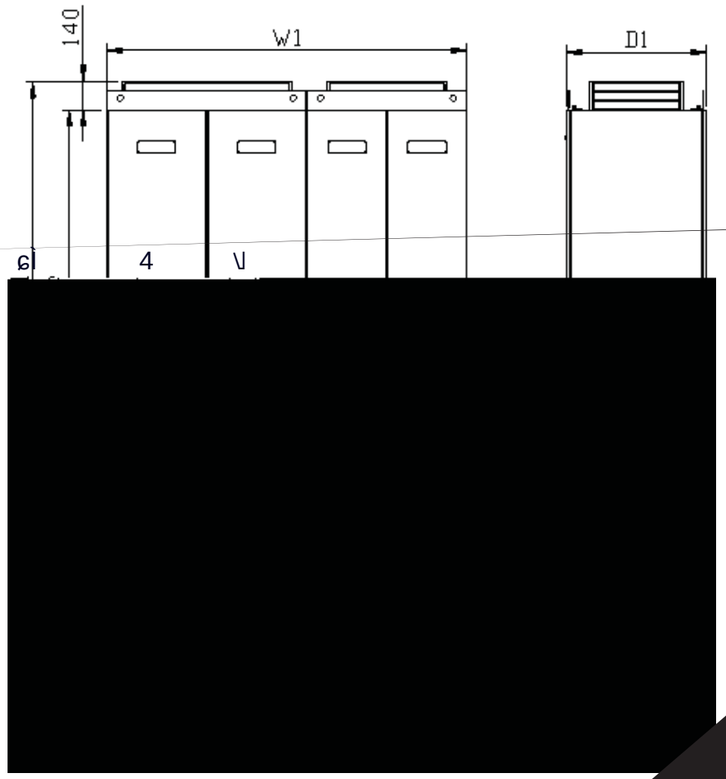


C4

250kW~400kW C4

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | D1 | Z | |
| 1 | HF500A -250 -4 -C4<br>HF500A -250 -4 -C4 - | 2040 | 1800 | 900 | 700 | 100 | 900 |
| 2 | HF500A -250 -4 -C4 - | 2140 | 1800 | 900 | 700 | 200 | 900 |
| 3 | HF500A -250 -4 -C4 - | 2190 | 1800 | 90 0 | 700 | 250 | 900 |
| | HF500A -250 -4 -C4 -Z | 2240 | 1800 | 900 | 700 | 300 | 900 |
| | 500A-31 5-4 -C4<br>15-4 -C4 -Z | 2140 | 1900 | 1000 | 700 | 100 | 1000 |
| | | 2240 | 1900 | 1000 | 700 | 200 | 1000 |

75kW~132kW C4

| | | H1 |
|---|---|---|
| 1 | HF500A -0 75-4 -C4<br>HF500A -075 -4 -C4 -Z1 | |
| 2 | HF500A -075 -4 -C4 -Z2 | |
| 3 | HF500A -07 5-4 -C | |
| 4 | HF500A -075 | |
| 5 | HF500A<br>HF5 | |
| 6 | | |
| 7 | | |

## 3.2 HF500 690V

### HF500LC-6 ( )

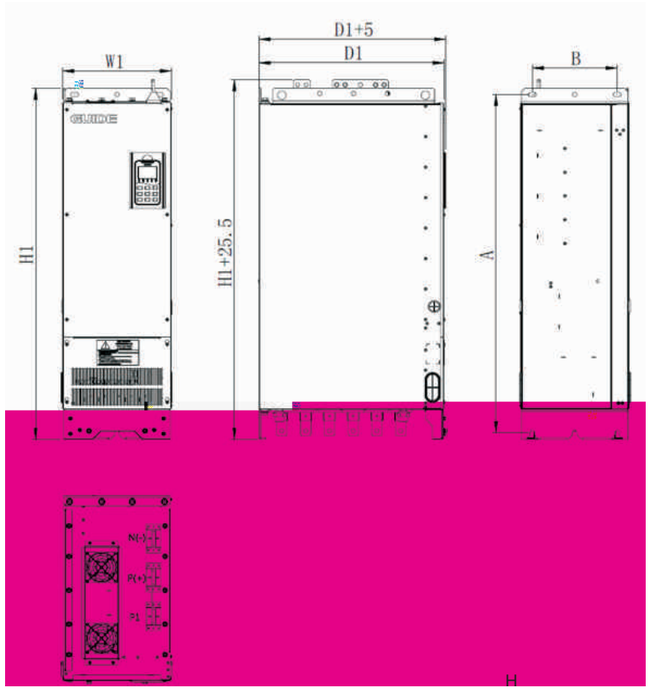


| | (kW) | ( mm) | | | ( mm) | | | 8.8 | kg | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | W1 | D1 | A | B | | | | |
| HF500LC-160-6 | 160 | 1036 | 320 | 545 | 998 | 250 | Φ 13 | M12 | 150 | G2 |
| HF500LC-200-6 | 200 | | | | | | | | | |
| HF500LC-250-6 | 250 | | | | | | | | | |
| HF500LC-280-6 | 280 | | | | | | | | | |
| HF500LC-315-6 | 315 | | | | | | | | | |
| HF500LC-355-6 | 355 | | | | | | | | | |
| HF500LC-400-6<br>HF500LC-400-6-S | 400 | 1186 | 320 | 545 | 1148 | 250 | Φ 13 | M12 | 170 | G3 |
| HF500LC-450-6<br>HF500LC-450-6-S | 450 | | | | | | | | | |
| HF500LC-500-6<br>HF500LC-500-6-S | 500 | | | | | | | | | |
| HF500LC-560-6<br>HF500LC-560-6-S | 560 | | | | | | | | | |
| HF500LC-630-6<br>HF500LC-630-6-S<br>HF500LC-710-6 | 630 | | | | | | | | | |



### HF500-6 ( )

1 HF500-6

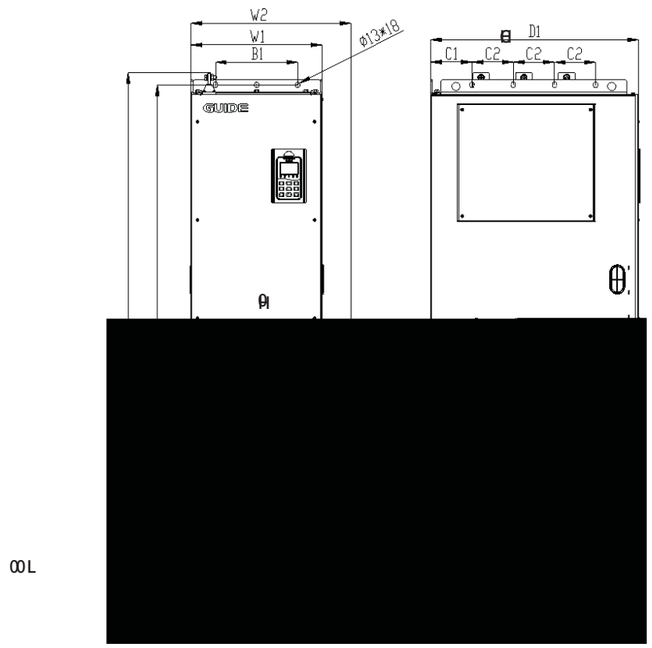


D1~D3

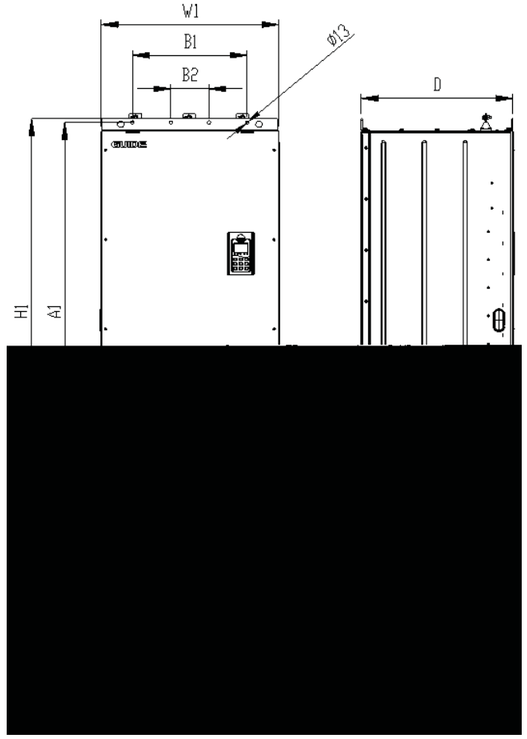


D4

| | ( mm) | | | | ( mm) | | | | | | | 8.8 | kg | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | H1 | W1 | W2 | D1 | A1 | A2 | B1 | B2 | C1 | C2 | | | | |
| HF500-055-6 | 1045 | 325 | 390 | 535 | 976.5 | 50.5 | 200 | 125 | 112 | 150 | 5-φ13 | 5-M10 | 120 | D1 |
| HF500-075-6 | | | | | | | | | | | | | | |
| HF500-090-6 | | | | | | | | | | | | | | |
| HF500-110-6 | | | | | | | | | | | | | | |
| HF500-132-6 | | | | | | | | | | | | | | |
| HF500-160-6 | 1370 | 345 | 435 | 585 | 1275 | 57.5 | 200 | 175 | 100 | 125 | 6-φ13 | 6-M10 | 150 | D2 |
| HF500-200-6 | | | | | | | | | | | | | | |
| HF500-250-6 | | | | | | | | | | | | | | |
| HF500-280-6 | 1595 | 400 | 485 | 635 | 1500 | 57.5 | 250 | 175 | 125 | 125 | 6-φ13 | 6-M10 | 200 | D3 |
| HF500-315-6 | | | | | | | | | | | | | | |
| HF500-355-6 | | | | | | | | | | | | | | |
| HF500-400-6 | 1475 | 700 | - | 600 | 1438 | - | 450 | 150 | 569 | 473 | 8-φ13 | 8-M10 | 300 | D4 |
| HF500-450-6 | | | | | | | | | | | | | | |
| HF500-500-6 | | | | | | | | | | | | | | |
| HF500-560-6 | | | | | | | | | | | | | | |



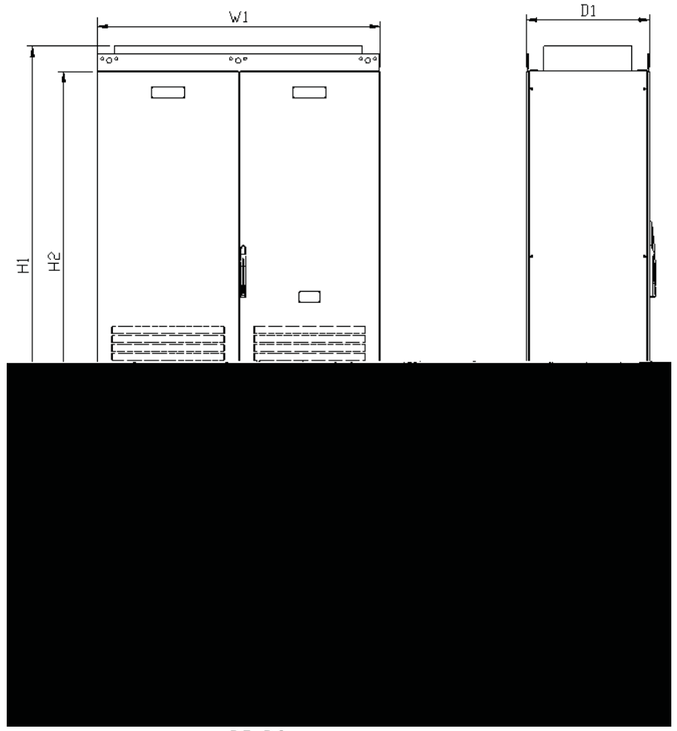


D5~D6



| | | mm) | | | | | kg) |
|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W1 | D1 | Z | |
| D5 | 630kW | 2450 | 2200 | 1200 | 700 | 100 | 900 |
| | 710kW | | | | | | |
| D6 | 800kW | 2450 | 2200 | 1600 | 700 | 100 | 1100 |

## HF500B-6

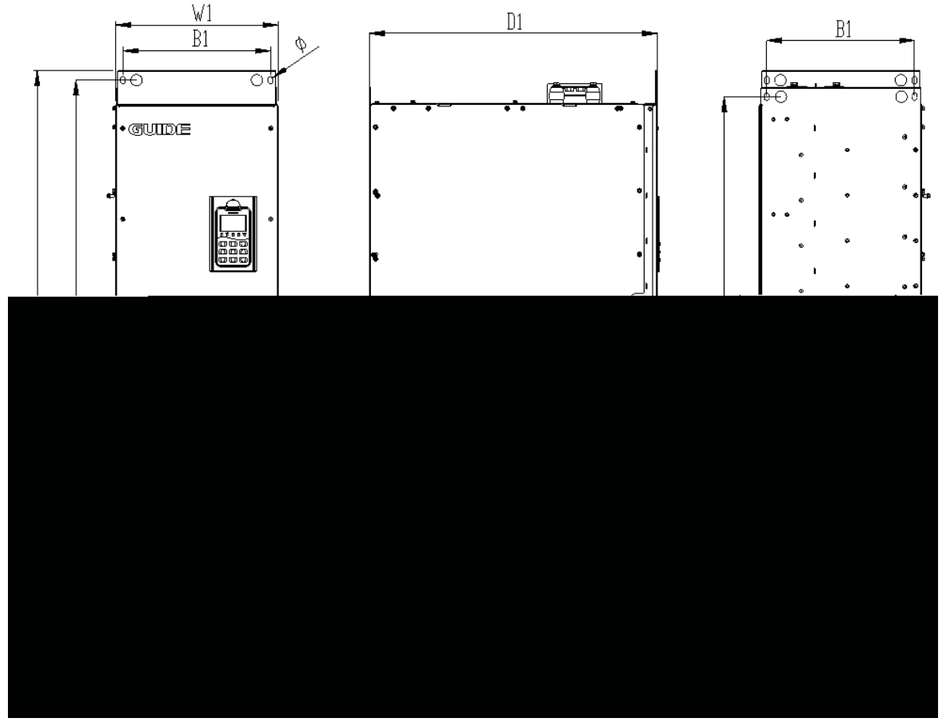

## 160kW~560kW

| | | mm | | | mm | | | | | | | | kg |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | W1 | D1 | A1 | A2 | A3 | A4 | B1 | B2 | | 8.8 | |
| 1 | HF500B-160-6-D<br>HF500B-200-6-D<br>HF500B-250-6-D | 1035 | 298 | 572 | 942 | 927 | 72.5 | 52.5 | 264 | 225 | 4-φ13 | 4-M10 | 120 |
| 2 | HF500B-280-6-D<br>HF500B-315-6-D<br>HF500B-355-6-D | 1196 | 353 | 562 | 1138 | 1123 | 47 | 37 | 325 | 282 | 4-φ13 | 4-M10 | 150 |
| 3 | HF500B-400-6-D<br>HF500B-450-6-D<br>HF500B-500-6-D<br>HF500B-560-6-D | 1335 | 356 | 634 | 1287 | 1240 | 43 | 37 | 325 | 275 | 4-φ13 | 4-M10 | 200 |

560kW

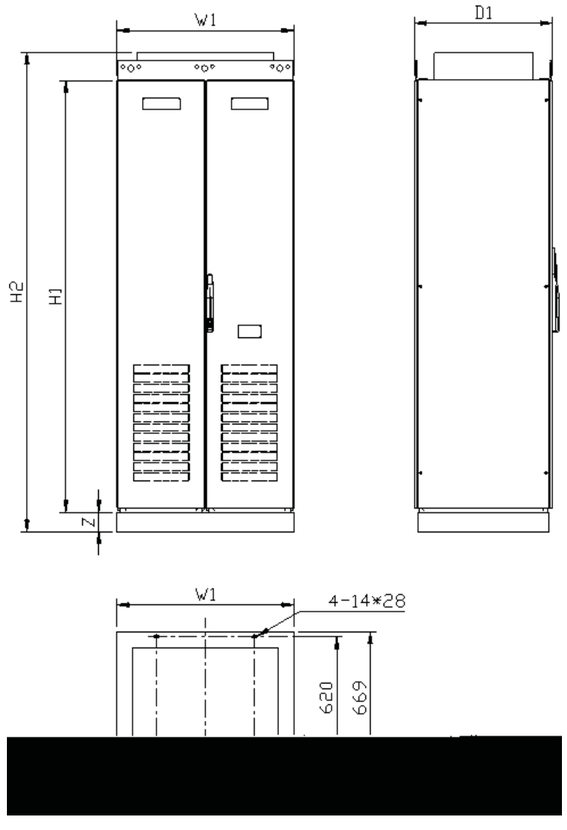


| | | mm | | | | | (kg) |
|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | D1 | Z | |
| 1 | HF500B-630-6-C<br>HF500B-630-6-C-Z1<br>HF500B-710-6-C<br>HF500B-710-6-C-Z1<br>HF500B-800-6-C<br>HF500B-800-6-C-Z1<br>HF500B-900-6-C<br>HF500B-900-6-C-Z1<br>HF500B-1000-6-C<br>HF500B-1000-6-C-Z1<br>HF500B-1120-6-C<br>HF500B-1120-6-C-Z1 | 2450 | 2200 | 900 | 700 | 100 | 900 |
| 2 | HF500B-630-6-C-Z2<br>HF500B-710-6-C-Z2<br>HF500B-800-6-C-Z2<br>HF500B-900-6-C-Z2<br>HF500B-1000-6-C-Z2<br>HF500B-1120-6-C-Z2 | 2550 | 2200 | 900 | 700 | 200 | 900 |
| 3 | HF500B-630-6-C-Z3<br>HF500B-710-6-C-Z3<br>HF500B-800-6-C-Z3<br>HF500B-900-6-C-Z3<br>HF500B-1000-6-C-Z3<br>HF500B-1120-6-C-Z3 | 2600 | 2200 | 900 | 700 | 250 | 900 |
| 4 | HF500B-630-6-C-Z4<br>HF500B-710-6-C-Z4<br>HF500B-800-6-C-Z4<br>HF500B-900-6-C-Z4<br>HF500B-1000-6-C-Z4<br>HF500B-1120-6-C-Z4 | 2650 | 2200 | 900 | 700 | 300 | 900 |

## HF500A-6

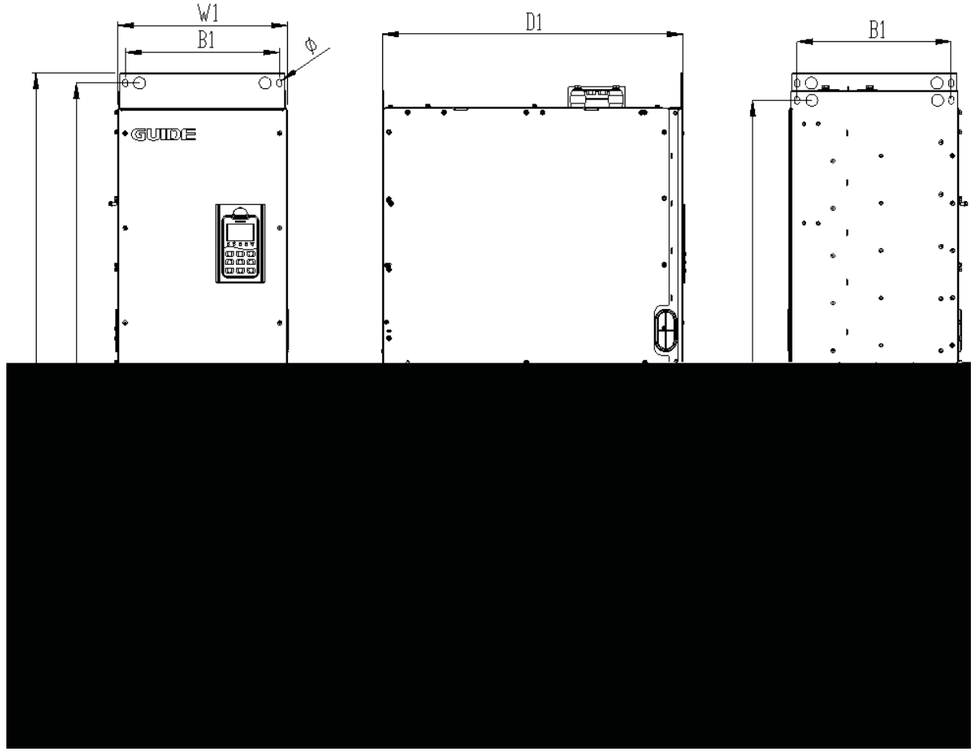


### 160kW~500kW

| | | mm | | | mm | | | | | | | | kg |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | W1 | D1 | A1 | A2 | A3 | A4 | B1 | B2 | | 8.8 | |
| 1 | HF500A-160-6-D<br>HF500A-250-6-D | 1035 | 298 | 572 | 942 | 927 | 72.5 | 52.5 | 264 | 225 | 4-φ13 | 4-M10 | 120 |
| 2 | HF500A-315-6-D | 1196 | 353 | 562 | 1138 | 1123 | 47 | 37 | 325 | 282 | 4-φ13 | 4-M10 | 150 |
| 3 | HF500A-400-6-D<br>HF500A-500-6-D | 1335 | 356 | 634 | 1287 | 1240 | 43 | 37 | 325 | 275 | 4-φ13 | 4-M10 | 200 |



HF500A-6 160kW~3000kW

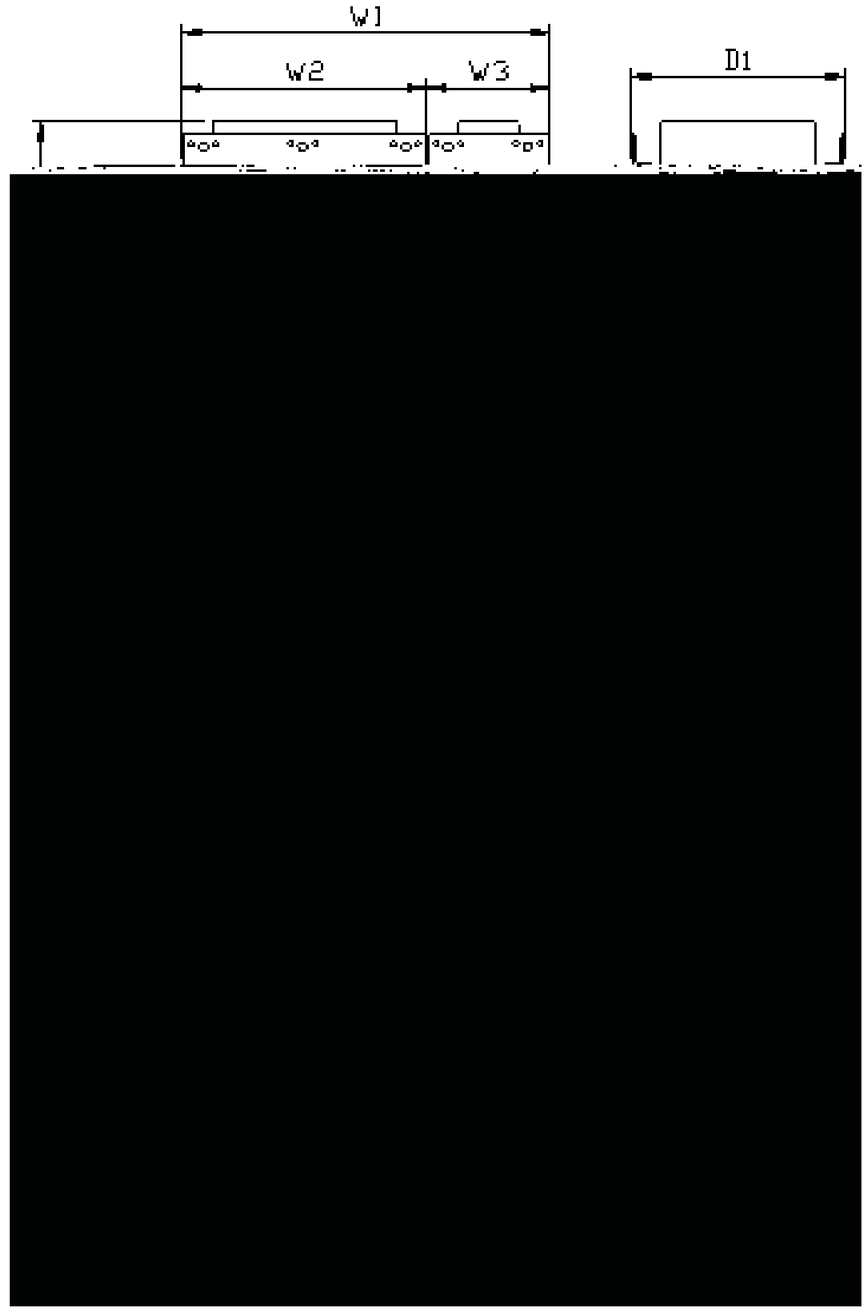


HF500A-160-6-C+P HF500A-250-6-C+P HF500A-315-6-C+P
HF500A-500-6-C+P

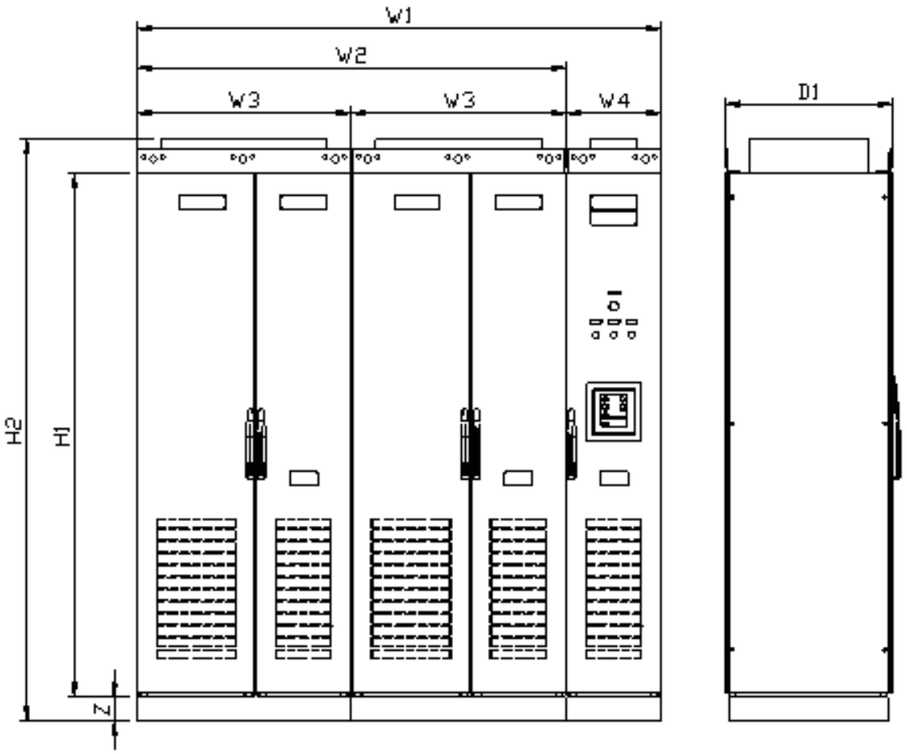


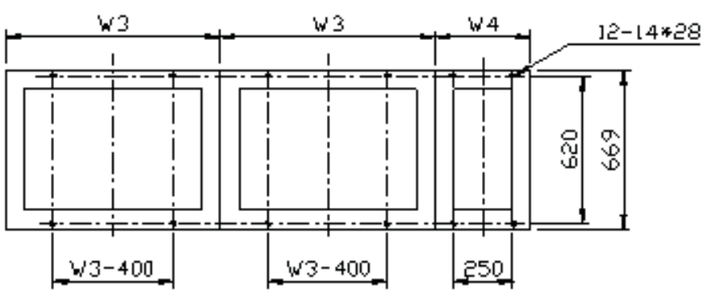


HF500A-630-6-C+P HF500A-800-6-C+P
HF500A-1000-6-C+P

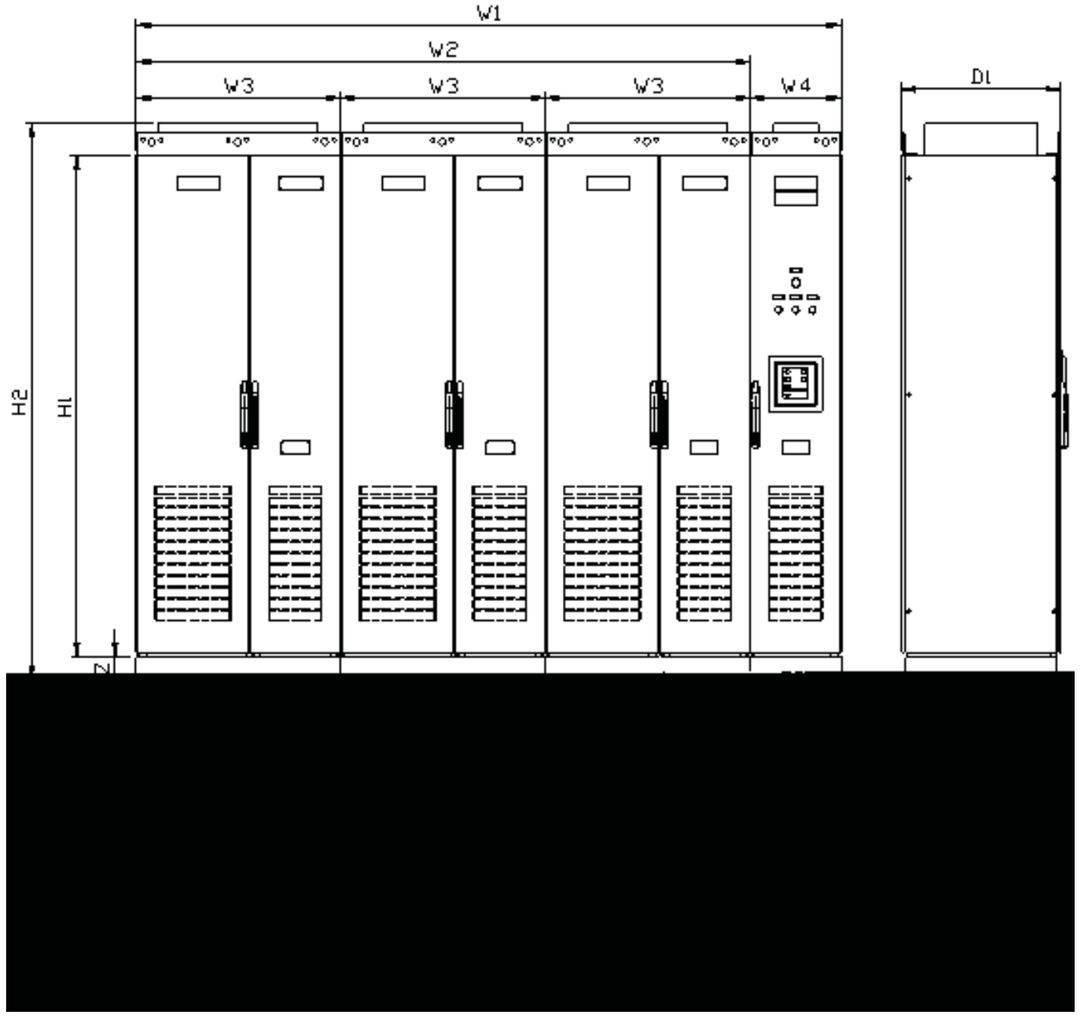


HF500A-1500-6-C+P

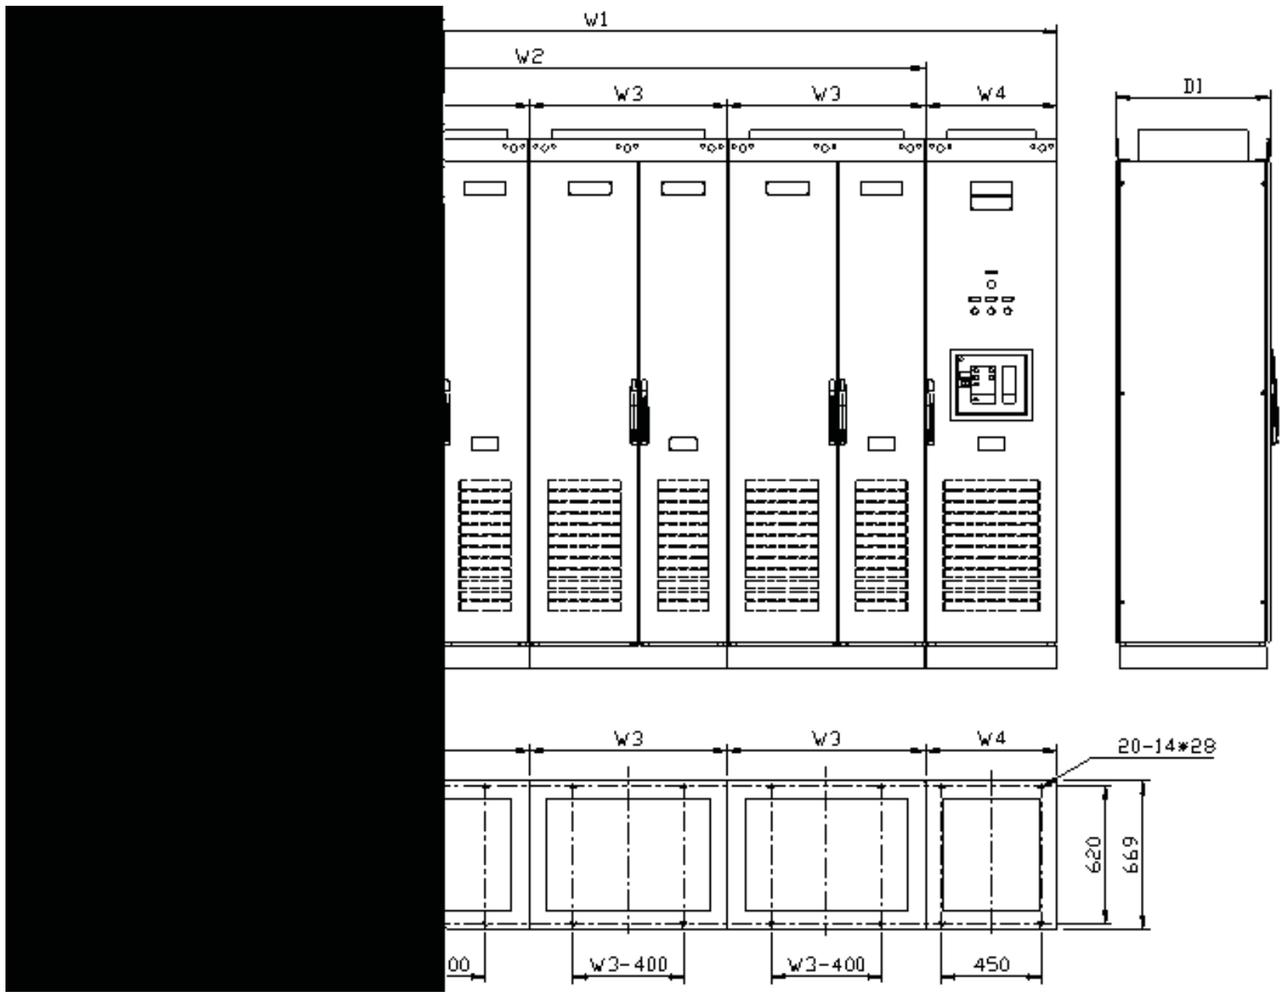


HF500A-2000-6-C+P

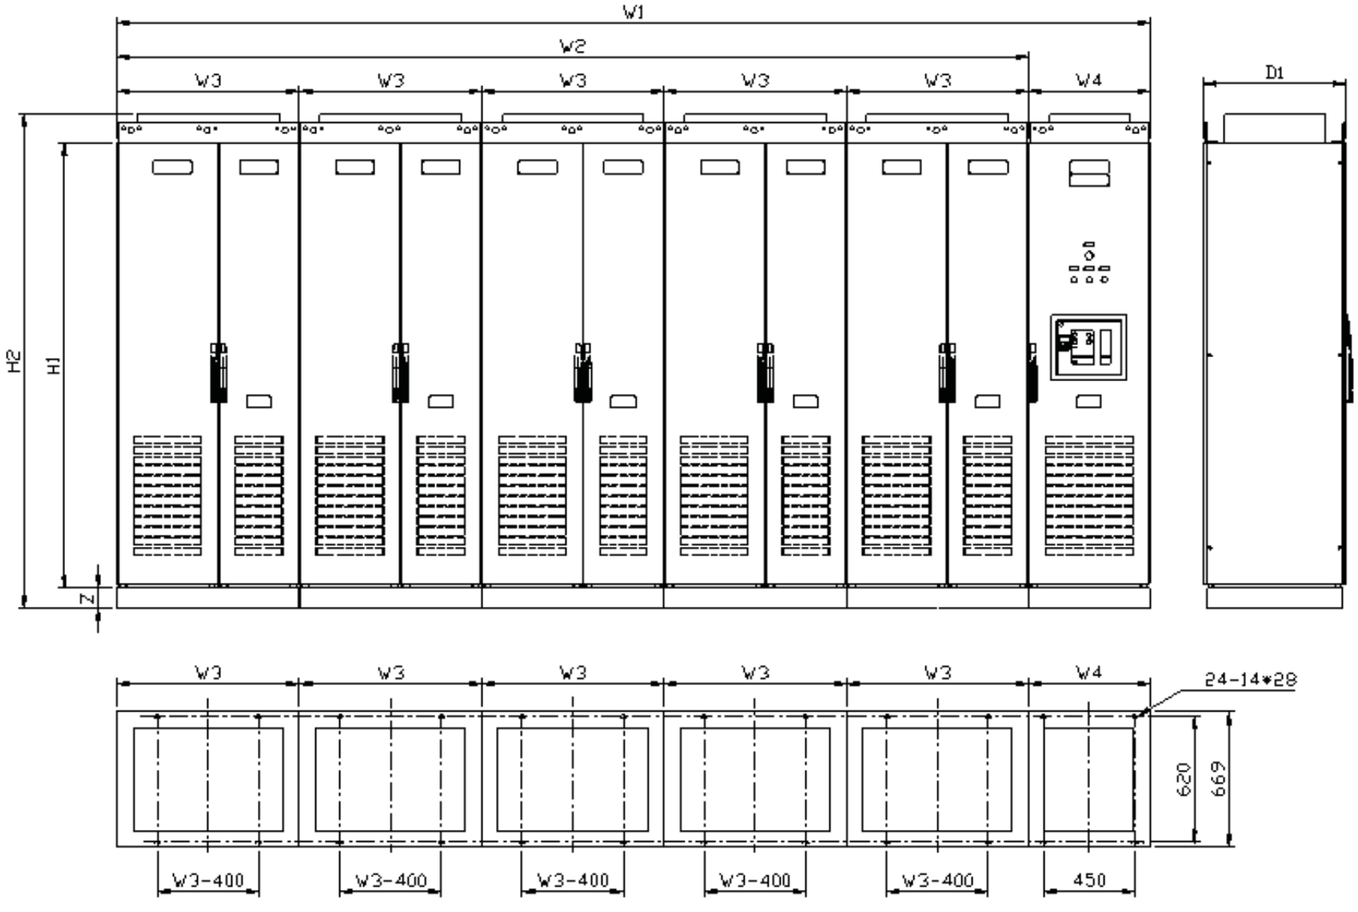


HF500A-2500-6-C+P

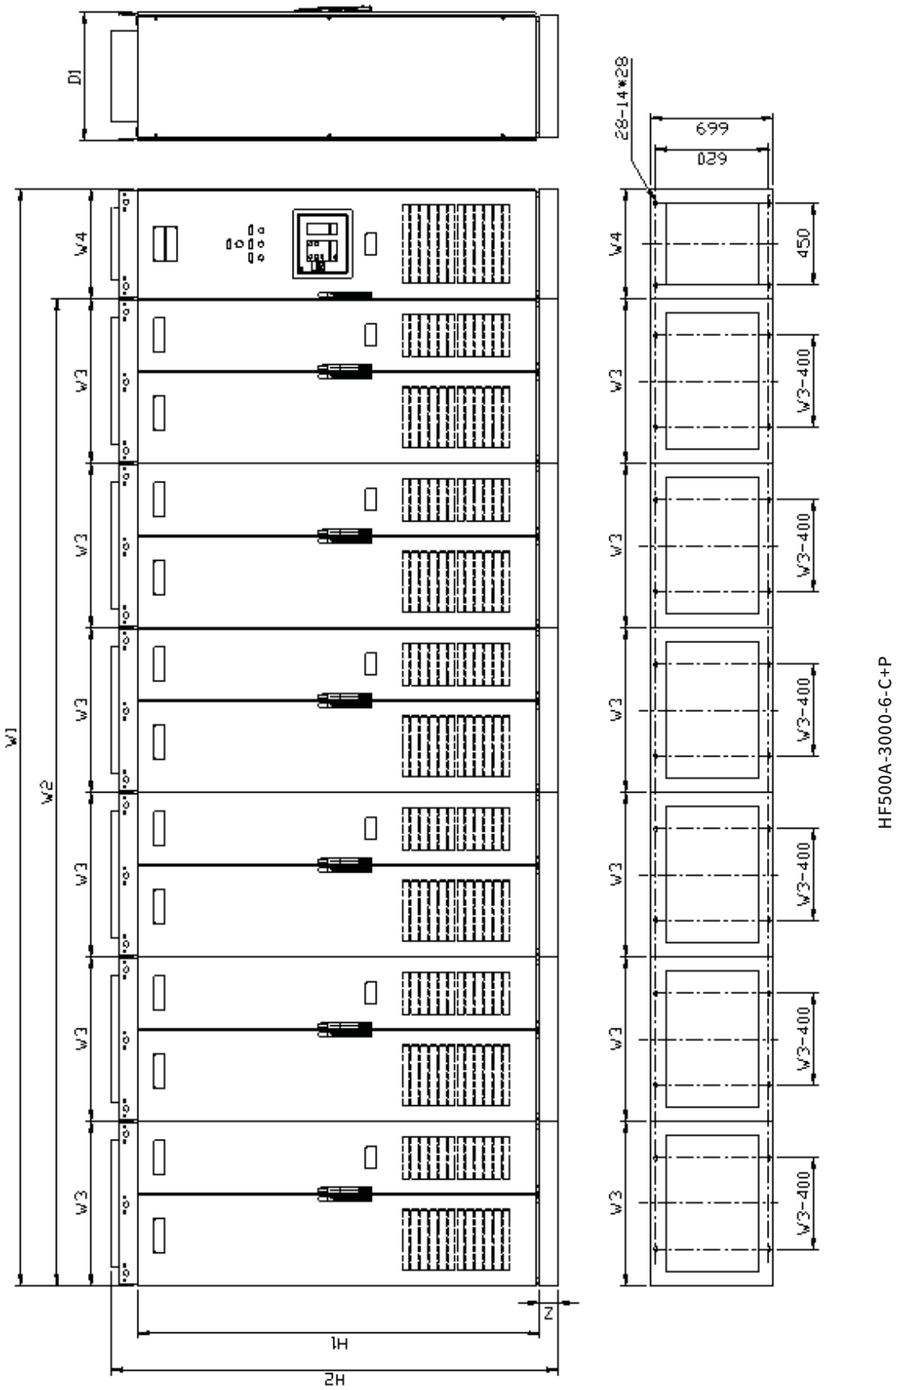


160kW 250kW

| | | mm) | | | | | | | kg |
|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | D1 | Z | |
| 1 | HF500A-160-6-C<br>HF500A-160-6-C-Z1<br>HF500A-250-6-C<br>HF500A-250-6-C-Z1 | 2450 | 2200 | / | 800 | / | 700 | 100 | 1000 |
| 2 | HF500A-160-6-C-Z2<br>HF500A-250-6-C-Z2 | 2550 | 2200 | / | 800 | / | 700 | 200 | 1000 |
| 3 | HF500A-160-6-C-Z3<br>HF500A-250-6-C-Z3 | 2600 | 2200 | / | 800 | / | 700 | 250 | 1000 |
| 4 | HF500A-160-6-C-Z4<br>HF500A-250-6-C-Z4 | 2650 | 2200 | / | 800 | / | 700 | 300 | 1000 |
| 5 | HF500A-160-6-C+P<br>HF500A-160-6-C-Z1+P<br>HF500A-250-6-C+P<br>HF500A-250-6-C-Z1+P | 2450 | 2200 | 1200 | 800 | 400 | 700 | 100 | 1150 |
| 6 | HF500A-160-6-C-Z2+P<br>HF500A-250-6-C-Z2+P | 2550 | 2200 | 1200 | 800 | 400 | 700 | 200 | 1150 |
| 7 | HF500A-160-6-C-Z3+P<br>HF500A-250-6-C-Z3+P | 2600 | 2200 | 1200 | 800 | 400 | 700 | 250 | 1150 |
| 8 | HF500A-160-6-C-Z4+P<br>HF500A-250-6-C-Z4+P | 2650 | 2200 | 1200 | 800 | 400 | 700 | 300 | 1150 |

## 315kW 400kW 500kW

| | | mm) | | | | | | | (kg) |
|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | D1 | Z | |
| 1 | HF500A -315 -6 -C<br>HF500A -315 -6 -C -Z1<br>HF500A -400 -6 -C<br>HF500A -400 -6 -C -Z1<br>HF500A -500 -6 -C<br>HF500A -500 -6 -C -Z1 | 2450 | 2200 | / | 900 | / | 700 | 100 | 10 00 |
| 2 | HF500A -315 -6 -C -Z2<br>HF500A -400 -6 -C -Z2<br>HF500A -500 -6 -C -Z2 | 2550 | 2200 | / | 900 | / | 700 | 200 | 1000 |
| 3 | HF500A -315 -6 -C -Z3<br>HF500 A -400 -6 -C -Z3<br>HF500A -500 -6 -C -Z3 | 2600 | 2200 | / | 900 | / | 700 | 250 | 1000 |
| 4 | HF500A -315 -6 -C -Z4<br>HF500A -400 -6 -C -Z4<br>HF500A -500 -6 -C -Z4 | 2650 | 2200 | / | 900 | / | 700 | 300 | 1000 |
| 5 | HF500A -315 -6 -C+P<br>HF500A -315 -6 -C -Z1+P<br>HF500A -400 -6 -C+P<br>HF50 0A -400 -6 -C -Z1+P<br>HF500A -500 -6 -C+P<br>HF500A -500 -6 -C -Z1+P | 2450 | 2200 | 1300 | 900 | 400 | 700 | 100 | 1150 |
| 6 | HF500A -315 -6 -C -Z2+P<br>HF500A -400 -6 -C -Z2+P<br>HF500A -500 -6 -C -Z2+P | 2550 | 2200 | 1300 | 900 | 400 | 700 | 200 | 1150 |
| 7 | HF500A -315 -6 -C -Z3+P<br>HF500 A -400 -6 -C -Z3+P<br>HF500A -500 -6 -C -Z3+P | 2600 | 2200 | 1300 | 900 | 400 | 700 | 250 | 1150 |
| 8 | HF500A -315 -6 -C -Z4+P<br>HF500A -400 -6 -C -Z4+P<br>HF500A -500 -6 -C -Z4+P | 2650 | 2200 | 1300 | 900 | 400 | 700 | 300 | 1150 |



## 630kW 800kW 1000kW

| | | mm) | | | | | | | | kg |
|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W4 | D1 | Z | |
| 1 | HF500A -630-6-C<br>HF500A -630-6-C-Z1<br>HF500A -800-6-C<br>HF500A -800-6-C-Z1<br>HF500A -1000-6-C<br>HF500A -1000-6-C-Z1 | 2450 | 2200 | / | 1800 | 900 | / | 700 | 100 | 1100<br>1200 |
| 2 | HF500A -630-6-C-Z2<br>HF500A -800-6-C-Z2<br>HF500A -1000-6-C-Z2 | 2550 | 2200 | / | 1800 | 900 | / | 700 | 200 | 1100<br>1200 |
| 3 | HF500A -630-6-C-Z3<br>HF500A -800-6-C-Z3<br>HF500A -1000-6-C-Z3 | 2600 | 2200 | / | 1800 | 900 | / | 700 | 250 | 1100<br>1200 |
| 4 | HF500A -630-6-C-Z4<br>HF500A -800-6-C-Z4<br>HF500A -1000-6-C-Z4 | 2650 | 2200 | / | 1800 | 900 | / | 700 | 300 | 1100<br>1200 |
| 5 | HF500A -630-6-C+P<br>HF500A -630-6-C-Z1+P<br>HF500A -800-6-C+P<br>HF500A -800-6-C-Z1+P<br>HF500A -10 00-6-C+P<br>HF500A -1000-6-C-Z1+P | 2450 | 2200 | 2200 | 1800 | 900 | 400 | 700 | 100 | 1300<br>1500 |
| 6 | HF500A -630-6-C-Z2+P<br>HF500A -800-6-C-Z2+P<br>HF500A -1000-6-C-Z2+P | 2550 | 2200 | 2200 | 1800 | 900 | 400 | 700 | 200 | 1300<br>1500 |
| 7 | HF500A -630-6-C-Z3+P<br>HF500A -800-6-C-Z3+P<br>HF500A -1000-6-C-Z3+P | 2600 | 2200 | 2200 | 1800 | 900 | 400 | 700 | 250 | 1300<br>1500 |
| 8 | HF500A -630-6-C-Z4+P<br>HF500A -800-6-C-Z4+P<br>HF500A -1000-6-C-Z4+P | 2650 | 2200 | 2200 | 1800 | 900 | 400 | 700 | 300 | 1300<br>1500 |

## 1500kW

| | | mm) | | | | | | | | (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W4 | D1 | Z | |
| 1 | HF500A-1500-6-C<br>HF500A-1500-6-C-Z1 | 2450 | 2200 | / | 2700 | 900 | / | 700 | 100 | 1800 |
| 2 | HF500A-1500-6-C-Z2 | 2550 | 2200 | / | 2700 | 900 | / | 700 | 200 | 1800 |
| 3 | HF500A-1500-6-C-Z3 | 2600 | 2200 | / | 2700 | 900 | / | 700 | 250 | 1800 |
| 4 | HF500A-1500-6-C-Z4 | 2650 | 2200 | / | 2700 | 900 | / | 700 | 300 | 1800 |
| 5 | HF500A-1500-6-C+P<br>HF500A-1500-6-C-Z1+P | 2450 | 2200 | 3300 | 2700 | 900 | 400 | 700 | 100 | 2200 |
| 6 | HF500A-1500-6-C-Z2+P | 2550 | 2200 | 3300 | 2700 | 900 | 400 | 700 | 200 | 2200 |
| 7 | HF500A-1500-6-C-Z3+P | 2600 | 2200 | 3300 | 2700 | 900 | 400 | 700 | 250 | 2200 |
| 8 | HF500A-1500-6-C-Z4+P | 2650 | 2200 | 3300 | 2700 | 900 | 400 | 700 | 300 | 2200 |

## 2000kW

| | | mm) | | | | | | | | (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W4 | D1 | Z | |
| 1 | HF500A-2000-6-C<br>HF500A-2000-6-C-Z1 | 2450 | 2200 | / | 3600 | 900 | / | 700 | 100 | 2500 |
| 2 | HF500A-2000-6-C-Z2 | 2550 | 2200 | / | 3600 | 900 | / | 700 | 200 | 2500 |
| 3 | HF500A-2000-6-C-Z3 | 2600 | 2200 | / | 3600 | 900 | / | 700 | 250 | 2500 |
| 4 | HF500A-2000-6-C-Z4 | 2650 | 2200 | / | 3600 | 900 | / | 700 | 300 | 2500 |
| 5 | HF500A-2000-6-C+P<br>HF500A-2000-6-C-Z1+P | 2450 | 2200 | 4200 | 3600 | 900 | 600 | 700 | 100 | 3000 |
| 6 | HF500A-2000-6-C-Z2+P | 2550 | 2200 | 4200 | 3600 | 900 | 600 | 700 | 200 | 3000 |
| 7 | HF500A-2000-6-C-Z3+P | 2600 | 2200 | 4200 | 3600 | 900 | 600 | 700 | 250 | 3000 |
| 8 | HF500A-2000-6-C-Z4+P | 2650 | 2200 | 4200 | 3600 | 900 | 600 | 700 | 300 | 3000 |

## 2500kW

| | | mm) | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W4 | D1 | Z | |
| 1 | HF500A-2500-6-C<br>HF500A-2500-6-C-Z1 | 2450 | 2200 | / | 4500 | 900 | / | 700 | 100 | 3200 |
| 2 | HF500A-2500-6-C-Z2 | 2550 | 2200 | / | 4500 | 900 | / | 700 | 200 | 3200 |
| 3 | HF500A-2500-6-C-Z3 | 2600 | 2200 | / | 4500 | 900 | / | 700 | 250 | 3200 |
| 4 | HF500A-2500-6-C-Z4 | 2650 | 2200 | / | 4500 | 900 | / | 700 | 300 | 3200 |
| 5 | HF500A-2500-6-C+P<br>HF500A-2500-6-C-Z1+P | 2450 | 2200 | 5100 | 4500 | 900 | 600 | 700 | 100 | 3800 |
| 6 | HF500A-2500-6-C-Z2+P | 2550 | 2200 | 5100 | 4500 | 900 | 600 | 700 | 200 | 3800 |
| 7 | HF500A-2500-6-C-Z3+P | 2600 | 2200 | 5100 | 4500 | 900 | 600 | 700 | 250 | 3800 |
| 8 | HF500A-2500-6-C-Z4+P | 2650 | 2200 | 5100 | 4500 | 900 | 600 | 700 | 300 | 3800 |

## 3000kW

| | | mm) | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | H1 | H2 | W 1 | W2 | W 3 | W4 | D1 | Z | |
| 1 | HF500A-3000-6-C<br>HF500A-3000-6-C-Z1 | 2450 | 2200 | / | 5400 | 900 | / | 700 | 100 | 3800 |

# 4 HF500

| | | |
|---|---|---|
| GDHF-DP02 | | GDHF-DP02 Profibus HF500 |
| GDHF-MB01 |  | GDHF-MB01 MODBUS-RTU RS485 RS232 RS485 RS232 MODBUS-RTU HF500 |
| GDHF-PN01 |  | GDHF-PN01 Profinet RJ45 HF500 |
| GDHF-CA01 | | GDHF-CA01 CAN-OPEN CAN2.0B HF500 |
| GDHF-PGC1 PG | | GDHF-PGC1 PG HF500 15V |
| GDHF-PGD1 PG | | GDHF-PGD1 PG HF500 15V |
| GDHF-DH | | GDHF-DH HF500 GDHF-DH + + 4 GB/T9074.4 2.0mm M4×6 |
| GDHF-KV2 | | GDHF-KV2 HF500 |



| | | |
|---|---|---|
| GDHF-KL2 2 | | GDHF-KL2 2 HF500 2 |
| GDHF-KL4 4 | | GDHF-KL4 4 HF500 4 |
| GDHF-MFB2 | | GDHF-MFB2 HF500 |
| GDHF-MFB3 | | GDHF-MFB3 HF500A-4 1200kW 2 |
| GDHF-MFB4 | | GDHF-MFB4 HF500A-4 1600kW 3 |
| GDHF15003FB02 |  | GDHF15003FB02 HF500A-6 690V 2000kW |
| GDHF-MFB5 | | GDHF-MFB5 HF500A 4 |
| GDHF-MFB6 | | GDHF-MFB6 HF500A 5 |

| | |
|---|---|
| | |